


Power Analyser

UMG 96-PA

UMG 96-PA^{MID}

up to firmware version 1.12

Modbus-address list
and Formulary

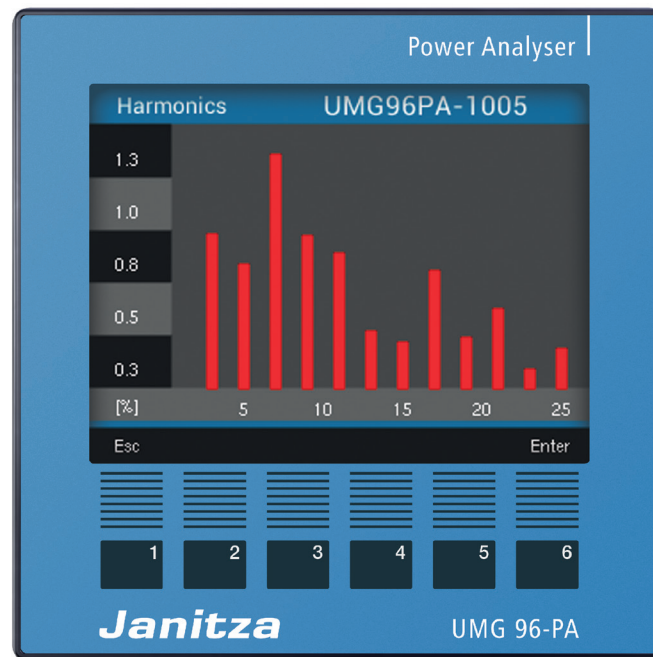

up to firmware vers. 1.12

08/2018

Doc. no. 2.061.029.1

www.janitza.com

Janitza electronics GmbH
Vor dem Polstück 6
D-35633 Lahnau
Support Tel. +49 6441 9642-22
Fax +49 6441 9642-30
E-mail: info@janitza.com
www.janitza.com

Janitza[®]

Content

| | |
|---|-----------|
| Modbus | 4 |
| Modbus Functions | 4 |
| Transfer parameters | 5 |
| Byte sequence | 5 |
| Update rate | 5 |
| Measured values | 5 |
| Number formats | 5 |
| Symbols and definitions | 5 |
| Explanations of the measured values | 6 |
| Address list | 12 |
| Frequently required readings | 12 |
| Measured values, type float | 14 |
| Measured values, type short | 16 |
| Mean values, type float | 17 |
| Mean values, type short | 18 |
| Minimum values, type float | 19 |
| Minimum values, type short | 20 |
| Maximum values, type float | 21 |
| Maximum values, type short | 22 |
| Maximum values of mean values, type float | 23 |
| Maximum values of mean values, type short | 23 |
| Energy, type float | 24 |
| Energy, type integer | 27 |
| Energy, type double | 30 |
| Energy, type double (UMG 96-PA-MID) | 32 |
| Peak indicator (drag indicator) | 34 |
| Minimum values, time stamp | 36 |
| Maximum values, time stamp | 38 |
| Fourier analysis | 41 |
| Measured values, type float, fourier analysis | 41 |
| Measured values, type short, fourier analysis | 43 |
| Mean values, type float, fourier analysis | 46 |
| Mean values, type short, fourier analysis | 48 |
| Maximum values, type float, fourier analysis | 50 |
| Maximum values, type short, fourier analysis | 52 |
| Minimum values, type float, fourier analysis | 54 |
| Minimum values, type short, fourier analysis | 55 |

Copyright

This handbook is subject to the legal regulations of the copyright laws and may not be fully or partially photocopied, reprinted or reproduced mechanically or electronically and may not be copied or published in any other way without the legal, written permission of

Janitza electronics GmbH
Vor dem Polstück 6
D35633 Lahnau
Germany

Protected trademarks

All trademarks and the resulting rights belong to the respective owners of these rights.

Disclaimer

Janitza electronics GmbH does not accept any responsibility for errors or faults within this handbook and does not accept any obligation to keep the contents of this handbook updated.

Comments on the handbook

We welcome your comments. If anything appears to be unclear in this handbook, please let us know and send us an E-MAIL to:
info@janitza.de

Modbus

Modbus Functions

As a slave, the UMG 96-PA supports the following modbus functions:

03 Read Holding Registers

Reads the binary contents of holding registers (4X references) in the slave.

04 Read Input Registers

Reads the binary contents of input registers (3X references) in the slave.

06 Preset Single Register

Presets a value into a single holding register (4X reference). When broadcast, the function presets the same register reference in all attached slaves.

16 (10Hex) Preset Multiple Registers

Presets values into a sequence of holding registers (4X references). When broadcast, the function presets the same register references in all attached slaves.

23 (17Hex) Read/Write 4X Registers

Performs a combination of one read and one write operation in a single Modbus transaction. The function can write new contents to a group of 4XXXX registers, and then return the contents of another group of 4XXXX registers. Broadcast is not supported.



Optec AG | Guyer-Zeller-Strasse 14 | CH-8620 Wetzikon ZH

Telefon: +41 44 933 07 70 | Telefax: +41 44 933 07 77

E-Mail: info@optec.ch | Internet: www.optec.ch

Transfer parameters

The UMG 96-PA supports the following transfer parameters:

| | |
|----------------------|--|
| Baud rate | : 9600, 19200, 38400, 57600 and 11500 Baud |
| Data bits | : 8 |
| Parity | : none |
| Stop bits (UMG 96RM) | : 2 |
| Stop bits external | : 1 or 2 |

Byte sequence

The data in the modbus address list can be called up in the

- Big-Endian (high-Byte before low-Byte) and in the
- Little-Endian (low-byte before high-byte)

format.

The addresses described in this address list supply the data in the „Big-Endian“ format.

If you require the data in the „Little-Endian“ format, you must add the value 32768 to the address.

Update rate

The modbus register addresses are updated every 200ms.

Measured values

- Measured values in the **short** format do not take into account the set transformer ratio, i.e. these measured values have to be multiplied by the corresponding transformer factor!
- Measured values in **float or integer format** take into account the corresponding transformer factors!

Number formats

| Type | Size | Minimum | Maximum |
|--------|--------|-----------|--------------|
| char | 8 bit | 0 | 255 |
| byte | 8 bit | -128 | 127 |
| short | 16 bit | -2^{15} | $2^{15} - 1$ |
| ushort | 16 bit | 0 | $2^{16} - 1$ |
| int | 32 bit | -2^{31} | $2^{31} - 1$ |
| uint | 32 bit | 0 | $2^{32} - 1$ |
| long64 | 64 bit | -2^{63} | $2^{63} - 1$ |
| float | 32 bit | IEEE 754 | IEEE 754 |
| double | 64 bit | IEEE 754 | IEEE 754 |

Symbols and definitions

| | |
|----------------|---|
| N | Total number of sample points per period (For example, in a period of 20 ms) |
| k | Sample value or number of samples per period ($0 \leq k < N$) |
| p | Number or identification of the phase conductor ($p = 1, 2$ oder 3) |
| ipk | Sample value k of the current of the phase conductor p |
| upNk | Sample value k of the neutral voltage of the phase conductor p |
| P _p | Real power of the phase conductor p |

Explanations of the measured values

Measured value

- A measured value is an effective value which is formed over a period (measuring window) of 200 ms.
- A measuring window is 10 periods in the 50 Hz network and 12 periods in the 60 Hz network.
- A measuring window has a start time and an end time.
- The resolution between the start time and end time is approximately 2 ns.
- The accuracy of the start time and end time depends on the accuracy of the internal clock.
(Typically +/- 1 minute/month)
- In order to improve the accuracy of the internal clock, it is recommended that the clock in the device is compared with a time service and reset.

Mean value of measured value

- For each measured value, a sliding mean value is calculated over the selected averaging time.
- The mean value is calculated every 200 ms.
- You can take the possible averaging times from the table.

| n | Mean time / seconds |
|---|---------------------|
| 0 | 5 |
| 1 | 10 |
| 2 | 15 |
| 3 | 30 |
| 4 | 60 |
| 5 | 300 |
| 6 | 480 |
| 7 | 600 |
| 8 | 900 |

Max. value of measured value

- The *max. value of the measured value* is the largest measured value which has occurred since the last deletion.

Min. value of measured value

- The *min. value of the measured value* is the lowest measured value which has occurred since the last deletion.

Max. value of mean value

- The *max. value of the mean value* is the largest mean value which has occurred since the last deletion.

Nominal current, voltage, frequency

- The limit values for events and transients are set by the nominal value in percentage.

Nominal current I_{rated}

- The I_{rated} is the nominal current of the transformers and is required for calculation of the K-factor.

Peak value negative

- Highest negative sampling value from the last 200 ms measuring window..

Peak value positive

- Highest positive sampling value from the last 200 ms measuring window.

Crest factor

- The crest factor describes the relation between the peak value and effective value of a periodic quantity. It serves as a characteristic value for general description of the curve form of a periodic quantity. The distortion factor is another example of a quantity for characterization of the difference from the pure sinusoidal form.
- Example: A sinusoidal change voltage with an effective value of 230 V has a peak value of approx. 325 V. The crest factor is then $325 \text{ V} / 230 \text{ V} = 1.414$.

Effective value of the current for phase conductor p

$$I_p = \sqrt{\frac{1}{N} \cdot \sum_{k=0}^{N-1} i_{pk}^2}$$

Effective value of neutral conductor current

$$I_N = \sqrt{\frac{1}{N} \cdot \sum_{k=0}^{N-1} (i_{1k} + i_{2k} + i_{3k})^2}$$

Effective voltage L-N

$$U_{pN} = \sqrt{\frac{1}{N} \cdot \sum_{k=0}^{N-1} u_{pN_k}^2}$$

Effective voltage L-L

$$U_{pg} = \sqrt{\frac{1}{N} \cdot \sum_{k=0}^{N-1} (u_{gN_k} - u_{pN_k})^2}$$

Star connection voltage (vectorial)

$$U_{\text{Sternpunktspannung}} = U_{1_{\text{rms}}} + U_{2_{\text{rms}}} + U_{3_{\text{rms}}}$$

Real power for phase conductor

$$P_p = \frac{1}{N} \cdot \sum_{k=0}^{N-1} (u_{pN_k} \times i_{pk})$$

Apparent power for phase conductor

- Unsigned

$$S_p = U_{pN} \cdot I_p$$

Total apparent power (arithmetic) S_A

- Unsigned

$$S_A = S_1 + S_2 + S_3$$

Peak demand P_{\max}

- T = Periodic time
- t_n = n-th interval time
- P_n = n-th Power measurement value
- N = Number of measuring intervals in the period T

$$P_{\max} = \max \left(P_{\max}; \frac{1}{T} \sum_{n=1}^N (t_n \cdot P_n) \right)$$

Order number of harmonics

xxx[0] = mains frequency (50 Hz/60 Hz)
 xxx[1] = 2nd harmonic (100 Hz/120 Hz)
 xxx[2] = 3rd harmonic (150 Hz/180 Hz)
 etc.

THD

- THD (Total Harmonic Distortion) is the distortion factor and provides the relation of the harmonic parts of an oscillation to the mains frequency.

Distortion factor for the voltage

- M = 40 (UMG 604, UMG 508, UMG 96RM)
- M = 50 (UMG 605, UMG 511)
- fund corresponds to n=1

$$THD_U = \frac{1}{|U_{fund}|} \sqrt{\sum_{n=2}^M |U_{n.Harm}|^2}$$

Distortion factor for the current

- M = 40 (UMG 604, UMG 508, UMG 96RM)
- M = 50 (UMG 605, UMG 511)
- fund corresponds to n=1

$$THD_I = \frac{1}{|I_{fund}|} \sqrt{\sum_{n=2}^M |I_{n.Harm}|^2}$$

ZHD

- THD for the interharmonics.
- Is calculated in the product series and UMG 511 UMG 605.

Interharmonics

- Sinusoidal oscillations, which frequencies are not a multiple integer of the mains frequency.
- Is calculated in the product series and UMG 511 UMG 605.
- Calculation and measurement methods in accordance with the DIN EN 61000-4-30.
- The order number of interharmonics corresponds to the order number of the next smallest harmonic. For example, between the 3rd and 4th harmonic of the 3rd interharmonics.

TDD (I)

- TDD Total demand distortion, harmonic current distortion in % of maximum demand load current
- IL = Maximum demand load current
- M = 40 (UMG 604, UMG 508, UMG 96RM)
- M = 50 (UMG 605, UMG 511)

$$TDD = \frac{1}{I_L} \sqrt{\sum_{n=2}^M I_n^2} \times 100\%$$

Ripple control signal U (EN61000-4-30)

The ripple control signal U is a voltage (200 ms measured value) which is measured at a carrier frequency specified by the user. Only frequencies beneath 3 kHz are observed.

Ripple control signal I

The ripple control signal I is a current (200 ms measured value) which is measured at a carrier frequency specified by the user. Only frequencies beneath 3 kHz are observed.

Positive sequence-negative sequence-zero sequence

- The extent of a voltage or current imbalance in a three-phase system is identified using the positive sequence, negative sequence and zero sequence components.
- The balance of the rotation current system strived for in normal operation is disturbed by the unsymmetrical loads, errors and equipment.
- A three-phase system is called symmetric, when the three phase conductor voltages and currents are the same size and are displaced against each other by 120°. If one or both conditions are not fulfilled, the system is described as un-symmetrical. By calculating the symmetrical components consisting of the positive sequence, negative sequence and zero sequence, the simplified analysis of an imbalanced error is possible in a rotary current system..
- Imbalance is a feature of the network quality for the limits specified in international norms (EN 50160 for example).

Positive sequence

$$U_{Mit} = \frac{1}{3} \left| U_{L1,fund} + U_{L2,fund} \cdot e^{j\frac{2\pi}{3}} + U_{L3,fund} \cdot e^{j\frac{4\pi}{3}} \right|$$

Negative sequence

$$U_{Geg} = \frac{1}{3} \left| U_{L1,fund} + U_{L2,fund} \cdot e^{-j\frac{2\pi}{3}} + U_{L3,fund} \cdot e^{-j\frac{4\pi}{3}} \right|$$

Zero sequence

$$U_{Nullsystem} = \frac{1}{3} \left| U_{L1,fund} + U_{L2,fund} + U_{L3,fund} \right|$$

A zero component can only occur if a sum current can flow back through the main conductor.

Voltage imbalance

$$Unsymmetrie = \frac{U_{Geg}}{U_{Mit}}$$

Under difference U (EN61000-4-30)

$$U_{unter} = \frac{U_{din} - \sqrt{\frac{\sum_{i=1}^n U_{rms-unter,i}^2}{n}}}{U_{din}} [\%]$$

Under difference I

$$I_{unter} = \frac{I_{Nennstrom} - \sqrt{\frac{\sum_{i=1}^n I_{rms-unter,i}^2}{n}}}{I_{Nennstrom}} [\%]$$

K-factor

- The K-factor describes the increase of the eddy current losses when loaded with harmonics. For a sinusoidal load on the transformer, the K-factor =1. The larger the K-factor, the heavier a transformer can be loaded with harmonics without overheating.

Power Factor (vectorial) - Lambda

- The power factor is unsigned.

$$PF_A = \frac{|P|}{S_A}$$

CosPhi - Fundamental Power Factor

- Only the mains frequency part is used for calculation of the cosphi.
- CosPhi sign:
 - = for the supply of real power
 - + = for obtaining real power

$$PF_1 = \cos(\varphi) = \frac{P_1}{S_1}$$

CosPhi total

- CosPhi sign:
 - = for the supply of real power
 - + = for obtaining real power

$$\cos(\varphi)_{Sum_3} = \frac{P_{1_{fund}} + P_{2_{fund}} + P_{3_{fund}}}{\sqrt{(P_{1_{fund}} + P_{2_{fund}} + P_{3_{fund}})^2 + (Q_{1_{fund}} + Q_{2_{fund}} + Q_{3_{fund}})^2}}$$

$$\cos(\varphi)_{Sum_4} = \frac{P_{1_{fund}} + P_{2_{fund}} + P_{3_{fund}} + P_{4_{fund}}}{\sqrt{(P_{1_{fund}} + P_{2_{fund}} + P_{3_{fund}} + P_{4_{fund}})^2 + (Q_{1_{fund}} + Q_{2_{fund}} + Q_{3_{fund}} + Q_{4_{fund}})^2}}$$

Phase Angle Phi

- The phase angle between current and voltage of the external conductor p is calculated according to DIN EN 61557-12 and displayed.
- The sign of the phase angle corresponding to the sign of the reactive power.

Mains frequency power factor

The mains frequency power factor is the power factor of the mains frequency and is calculated using the fourier analysis (FFT). The voltage and current must not be sinusoidal. All in the device calculated reactive power are resulting of fundamental reactive power.

Power factor sign

- Sign $Q = +1$ for φ_p in the range $0^\circ \dots 180^\circ$ (inductive)
- Sign $Q = -1$ for φ_p in the range $180^\circ \dots 360^\circ$ (capacitive)

$$\text{Vorzeichen } Q(\varphi_p) = +1 \text{ falls } \varphi_p \in [0^\circ - 180^\circ]$$

$$\text{Vorzeichen } Q(\varphi_p) = -1 \text{ falls } \varphi_p \in [180^\circ - 360^\circ]$$

Reactive power for phase conductor p

- Reactive power of the mains frequency.

$$Q_{fund p} = \text{Vorzeichen } Q(\varphi_p) \cdot \sqrt{S_{fund p}^2 - P_{fund p}^2}$$

Total reactive power

- Reactive power of the mains frequency.

$$Q_V = Q_1 + Q_2 + Q_3$$

Distortion power factor

- The distortion power factor is the power factor of all mains frequencies and is calculated using the fourier analysis (FFT).
- The apparent power „S” contains all fundamental harmonics and all harmonic rates up to the M-th harmonic.
- The effective power „P” contains all fundamental harmonics and all harmonic rates up to the M-th harmonic.
- M = 50 (UMG 605, UMG 605-PRO, UMG 511, UMG 512-PRO)

$$D = \sqrt{S^2 - P^2 - Q_{fund}^2}$$

Reactive energy per phase

$$E_{r_{L1}} = \int Q_{L1}(t) \cdot \Delta t$$

Reactive energy per phase, inductive

$$E_{r(ind)_{L1}} = \int Q_{L1}(t) \cdot \Delta t \quad \text{für } Q_{L1}(t) > 0$$

Reactive energy per phase, capacitive

$$E_{r(cap)_{L1}} = \int Q_{L1}(t) \cdot \Delta t \quad \text{für } Q_{L1}(t) < 0$$

Reactive energy, sum L1-L3

$$E_{r_{L1,L2,L3}} = \int (Q_{L1}(t) + Q_{L2}(t) + Q_{L3}(t)) \cdot \Delta t$$

Reactive energy, sum L1-L3, inductive

$$E_{r(ind)_{L1,L2,L3}} = \int (Q_{L1}(t) + Q_{L2}(t) + Q_{L3}(t)) \cdot \Delta t$$

für $(Q_{L1}(t) + Q_{L2}(t) + Q_{L3}(t)) > 0$

Reactive energy, sum L1-L3, capacitive

$$E_{r(cap)_{L1,L2,L3}} = \int (Q_{L1}(t) + Q_{L2}(t) + Q_{L3}(t)) \cdot \Delta t$$

für $(Q_{L1}(t) + Q_{L2}(t) + Q_{L3}(t)) < 0$

Address list

Frequently required readings

| Address | Format | RD/WR | Variable | Unit | Note |
|---------|--------|-------|-----------------|------|--|
| 19000 | float | RD | _ULN[0] | V | Voltage L1-N |
| 19002 | float | RD | _ULN[1] | V | Voltage L2-N |
| 19004 | float | RD | _ULN[2] | V | Voltage L3-N |
| 19006 | float | RD | _ULL[0] | V | Voltage L1-L2 |
| 19008 | float | RD | _ULL[1] | V | Voltage L2-L3 |
| 19010 | float | RD | _ULL[2] | V | Voltage L3-L1 |
| 19012 | float | RD | _ILN[0] | A | Current, L1 |
| 19014 | float | RD | _ILN[1] | A | Current, L2 |
| 19016 | float | RD | _ILN[2] | A | Current, L3 |
| 19018 | float | RD | _I_SUM3 | A | Vector sum; $I_N=I_1+I_2+I_3$ |
| 19020 | float | RD | _PLN[0] | W | Real power L1 |
| 19022 | float | RD | _PLN[1] | W | Real power L2 |
| 19024 | float | RD | _PLN[2] | W | Real power L3 |
| 19026 | float | RD | _P_SUM3 | W | Sum; $P_{sum3}=P_1+P_2+P_3$ |
| 19028 | float | RD | _SLN[0] | VA | Apparent power L1 |
| 19030 | float | RD | _SLN[1] | VA | Apparent power L2 |
| 19032 | float | RD | _SLN[2] | VA | Apparent power L3 |
| 19034 | float | RD | _S_SUM3 | VA | Sum; $S_{sum3}=S_1+S_2+S_3$ |
| 19036 | float | RD | _QLN[0] | var | Reactive power (mains frequ.) L1 |
| 19038 | float | RD | _QLN[1] | var | Reactive power (mains frequ.) L2 |
| 19040 | float | RD | _QLN[2] | var | Reactive power (mains frequ.) L3 |
| 19042 | float | RD | _Q_SUM3 | var | Sum; $Q_{sum3}=Q_1+Q_2+Q_3$ |
| 19044 | float | RD | _COS_PHI[0] | | Fund.power factor, CosPhi; UL1 IL1 |
| 19046 | float | RD | _COS_PHI[1] | | Fund.power factor, CosPhi; UL2 IL2 |
| 19048 | float | RD | _COS_PHI[2] | | Fund.power factor, CosPhi; UL3 IL3 |
| 19050 | float | RD | _FREQ | Hz | Measured frequency |
| 19052 | float | RD | _PHASE_SEQ | | Rotation field; 1=right, 0=none, -1=left |
| 19054* | float | RD | _WH_V[0] | Wh | Real energy L1, consumed |
| 19056* | float | RD | _WH_V[1] | Wh | Real energy L2, consumed |
| 19058* | float | RD | _WH_V[2] | Wh | Real energy L3, consumed |
| 19060 | float | RD | _WH_V_HT_SUML13 | Wh | Real energy L1..L3 |
| 19062 | float | RD | _WH_V[0] | Wh | Real energy L1, consumed |
| 19064 | float | RD | _WH_V[1] | Wh | Real energy L2, consumed |
| 19066 | float | RD | _WH_V[2] | Wh | Real energy L3, consumed |
| 19068 | float | RD | _WH_V_HT_SUML13 | Wh | Real energy L1..L3, consumed, rate 1 |
| 19070 | float | RD | _WH_Z[0] | Wh | Real energy L1, delivered |
| 19072 | float | RD | _WH_Z[1] | Wh | Real energy L2, delivered |
| 19074 | float | RD | _WH_Z[2] | Wh | Real energy L3, delivered |
| 19076 | float | RD | _WH_Z_SUML13 | Wh | Real energy L1..L3, delivered |
| 19078 | float | RD | _WH_S[0] | VAh | Apparent energy L1 |
| 19080 | float | RD | _WH_S[1] | VAh | Apparent energy L2 |
| 19082 | float | RD | _WH_S[2] | VAh | Apparent energy L3 |
| 19084 | float | RD | _WH_S_SUML13 | VAh | Apparent energy L1..L3 |
| 19086* | float | RD | _IQH[0] | varh | Reactive energy, inductive, L1 |
| 19088* | float | RD | _IQH[1] | varh | Reactive energy, inductive, L2 |
| 19090* | float | RD | _IQH[2] | varh | Reactive energy, inductive, L3 |
| 19092 | float | RD | _IQH_SUML13 | varh | Reactive energy L1..L3 |
| 19094 | float | RD | _IQH[0] | varh | Reactive energy, inductive, L1 |
| 19096 | float | RD | _IQH[1] | varh | Reactive energy, inductive, L2 |
| 19098 | float | RD | _IQH[2] | varh | Reactive energy, inductive, L3 |
| 19100 | float | RD | _IQH_SUML13 | varh | Reactive energy L1..L3, ind. |
| 19102 | float | RD | _CQH[0] | varh | Reactive energy, capacitive, L1 |
| 19104 | float | RD | _CQH[1] | varh | Reactive energy, capacitive, L2 |
| 19106 | float | RD | _CQH[2] | varh | Reactive energy, capacitive, L3 |
| 19108 | float | RD | _CQH_SUML13 | varh | Reactive energy L1..L3, cap. |

* The selected device addresses do not match with the standard device addresses of the UMG series.

| Address | Format | RD/WR | Variable | Unit | Unit |
|---------|--------|-------|-------------|------|----------------------|
| 19110 | float | RD | _THD_ULN[0] | % | Harmonic, THD,U L1-N |
| 19112 | float | RD | _THD_ULN[1] | % | Harmonic, THD,U L2-N |
| 19114 | float | RD | _THD_ULN[2] | % | Harmonic, THD,U L3-N |
| 19116 | float | RD | _THD_ILN[0] | % | Harmonic, THD,I L1 |
| 19118 | float | RD | _THD_ILN[1] | % | Harmonic, THD,I L2 |
| 19120 | float | RD | _THD_ILN[2] | % | Harmonic, THD,I L3 |

Measured values, type float

| Address | Format | RD/WR | Note |
|---------|--------|-------|--|
| 1000 | float | RD | voltage L1-N |
| 1002 | float | RD | voltage L2-N |
| 1004 | float | RD | voltage L3-N |
| 1006 | float | RD | voltage L1-L2 |
| 1008 | float | RD | voltage L2-L3 |
| 1010 | float | RD | voltage L3-L1 |
| 1012 | float | RD | current L1 |
| 1014 | float | RD | current L2 |
| 1016 | float | RD | current L3 |
| 1018 | float | RD | current sum (calculated current in N) |
| 1020 | float | RD | active power L1 |
| 1022 | float | RD | active power L2 |
| 1024 | float | RD | active power L3 |
| 1026 | float | RD | active power sum |
| 1028 | float | RD | reactive power L1 |
| 1030 | float | RD | reactive power L2 |
| 1032 | float | RD | reactive power L3 |
| 1034 | float | RD | reactive power sum |
| 1036 | float | RD | apparent power L1 |
| 1038 | float | RD | apparent power L2 |
| 1040 | float | RD | apparent power L3 |
| 1042 | float | RD | apparent power sum |
| 1044 | float | RD | cos(phi) L1 |
| 1046 | float | RD | cos(phi) L2 |
| 1048 | float | RD | cos(phi) L3 |
| 1050 | float | RD | cos(phi) sum |
| 1052 | float | RD | active power of the fundamental oscillation L1 |
| 1054 | float | RD | active power of the fundamental oscillation L2 |
| 1056 | float | RD | active power of the fundamental oscillation L3 |
| 1214 | float | RD | THD voltage L1 |
| 1216 | float | RD | THD voltage L2 |
| 1218 | float | RD | THD voltage L3 |
| 1220 | float | RD | THD current L1 |
| 1222 | float | RD | THD current L2 |
| 1224 | float | RD | THD current L3 |
| 1226 | float | RD | frequency |
| 1228 | float | RD | zero sequence voltage |
| 1230 | float | RD | positive sequence voltage |
| 1232 | float | RD | negative sequence voltage |
| 1234 | float | RD | zero sequence current |
| 1236 | float | RD | positive sequence current |
| 1238 | float | RD | negative sequence current |
| 1240 | float | RD | distortion power L1 |
| 1242 | float | RD | distortion power L2 |
| 1244 | float | RD | distortion power L3 |
| 1246 | float | RD | distortion power sum |
| 1248 | float | RD | rotation field |
| 1250 | float | RD | real part of the fundamental oscillation voltage L1 |
| 1252 | float | RD | imaginary part of the fundamental oscillation voltage L1 |
| 1254 | float | RD | real part of the fundamental oscillation voltage L2 |
| 1256 | float | RD | imaginary part of the fundamental oscillation voltage L2 |
| 1258 | float | RD | real part of the fundamental oscillation voltage L3 |
| 1260 | float | RD | imaginary part of the fundamental oscillation voltage L3 |
| 1262 | float | RD | real part of the fundamental oscillation current L1 |
| 1264 | float | RD | imaginary part of the fundamental oscillation current L1 |
| 1266 | float | RD | real part of the fundamental oscillation current L2 |
| 1268 | float | RD | imaginary part of the fundamental oscillation current L2 |

| Address | Format | RD/WR | Note |
|---------|--------|-------|--|
| 1270 | float | RD | real part of the fundamental oscillation current L3 |
| 1272 | float | RD | imaginary part of the fundamental oscillation current L3 |
| 1274 | float | RD | frequency (200ms) |
| 1276 | float | RD | TDD (total demand distortion) current L1 |
| 1278 | float | RD | TDD (total demand distortion) current L2 |
| 1280 | float | RD | TDD (total demand distortion) current L3 |
| 1282 | float | RD | crest factor voltageL1 |
| 1284 | float | RD | crest factor voltageL2 |
| 1286 | float | RD | crest factor voltageL3 |
| 1288 | float | RD | crest factor current L1 |
| 1290 | float | RD | crest factor current L2 |
| 1292 | float | RD | crest factor current L3 |

Measured values, type short

| Address | Format | RD/WR | Note |
|---------|----------------|-------|---|
| 11000 | short (x10) | RD | voltage L1-N |
| 11001 | short (x10) | RD | voltage L2-N |
| 11002 | short (x10) | RD | voltage L3-N |
| 11003 | short (x10) | RD | voltage L1-L2 |
| 11004 | short (x10) | RD | voltage L2-L3 |
| 11005 | short (x10) | RD | voltage L3-L1 |
| 11006 | short (x1000) | RD | current L1 |
| 11007 | short (x1000) | RD | current L2 |
| 11008 | short (x1000) | RD | current L3 |
| 11009 | short (x1000) | RD | current sum |
| 11010 | short (x10) | RD | active power L1 |
| 11011 | short (x10) | RD | active power L2 |
| 11012 | short (x10) | RD | active power L3 |
| 11013 | short | RD | active power sum |
| 11014 | short (x10) | RD | reactive power L1 |
| 11015 | short (x10) | RD | reactive power L2 |
| 11016 | short (x10) | RD | reactive power L3 |
| 11017 | short | RD | reactive power sum |
| 11018 | short (x10) | RD | apparent power L1 |
| 11019 | short (x10) | RD | apparent power L2 |
| 11020 | short (x10) | RD | apparent power L3 |
| 11021 | short | RD | apparent power sum |
| 11022 | short (x100) | RD | cos(phi) L1 |
| 11023 | short (x100) | RD | cos(phi) L2 |
| 11024 | short (x100) | RD | cos(phi) L3 |
| 11025 | short (x100) | RD | cos(phi) sum |
| 11026 | short (x10) | RD | active power fundamental oscillation L1 |
| 11027 | short (x10) | RD | active power fundamental oscillation L2 |
| 11028 | short (x10) | RD | active power fundamental oscillation L3 |
| 11111 | short (x100) | RD | THD voltage L1-N |
| 11112 | short (x100) | RD | THD voltage L2-N |
| 11113 | short (x100) | RD | THD voltage L3-N |
| 11114 | short (x100) | RD | THD current L1 |
| 11115 | short (x100) | RD | THD current L2 |
| 11116 | short (x100) | RD | THD current L3 |
| 11117 | short | RD | frequency |
| 11118 | short | RD | zero sequence voltage |
| 11119 | short | RD | positive sequence voltage |
| 11120 | short | RD | negative sequence voltage |
| 11121 | short | RD | zero sequence current |
| 11122 | short | RD | positive sequence current |
| 11123 | short | RD | negative sequence current |
| 11124 | short (x10) | RD | distortion power L1 |
| 11125 | short (x10) | RD | distortion power L2 |
| 11126 | short (x10) | RD | distortion power L3 |
| 11127 | short | RD | distortion power sum |
| 11128 | short | RD | rotation field |
| 11168 | ushort (x1000) | RD | crest faktor voltage L1-N |
| 11169 | ushort (x1000) | RD | crest faktor voltage L2-N |
| 11170 | ushort (x1000) | RD | crest faktor voltage L3-N |
| 11171 | ushort (x1000) | RD | crest faktor current L1 |
| 11172 | ushort (x1000) | RD | crest faktor current L2 |
| 11173 | ushort (x1000) | RD | crest faktor current L3 |

Mean values, type float

| Address | Format | RD/WR | Note |
|---------|--------|-------|---|
| 2000 | float | RD | mean value voltage L1 |
| 2002 | float | RD | mean value voltage L2 |
| 2004 | float | RD | mean value voltage L3 |
| 2006 | float | RD | mean value voltage L1-L2 |
| 2008 | float | RD | mean value voltage L2-L3 |
| 2010 | float | RD | mean value voltage L3-L1 |
| 2012 | float | RD | mean value current L1 |
| 2014 | float | RD | mean value current L2 |
| 2016 | float | RD | mean value current L3 |
| 2018 | float | RD | mean value current sum |
| 2020 | float | RD | mean value active power L1 |
| 2022 | float | RD | mean value active power L2 |
| 2024 | float | RD | mean value active power L3 |
| 2026 | float | RD | mean value active power sum |
| 2028 | float | RD | mean value reactive power L1 |
| 2030 | float | RD | mean value reactive power L2 |
| 2032 | float | RD | mean value reactive power L3 |
| 2034 | float | RD | mean value reactive power sum |
| 2036 | float | RD | mean value apparent power L1 |
| 2038 | float | RD | mean value apparent power L2 |
| 2040 | float | RD | mean value apparent power L3 |
| 2042 | float | RD | mean value apparent power sum |
| 2044 | float | RD | mean value cos(phi) L1 |
| 2046 | float | RD | mean value cos(phi) L2 |
| 2048 | float | RD | mean value cos(phi) L3 |
| 2050 | float | RD | mean value cos(phi) sum |
| 2052 | float | RD | mean value active power, fundamental oscillation L1 |
| 2054 | float | RD | mean value active power, fundamental oscillation L2 |
| 2056 | float | RD | mean value active power, fundamental oscillation L3 |
| 2214 | float | RD | mean value THD voltage L1 |
| 2216 | float | RD | mean value THD voltage L2 |
| 2218 | float | RD | mean value THD voltage L3 |
| 2220 | float | RD | mean value THD current L1 |
| 2222 | float | RD | mean value THD current L2 |
| 2224 | float | RD | mean value THD current L3 |
| 2226 | float | RD | mean value frequency |
| 2228 | float | RD | mean value zero sequence voltage |
| 2230 | float | RD | mean value positive sequence voltage |
| 2232 | float | RD | mean value negative sequence voltage |
| 2234 | float | RD | mean value zero sequence current |
| 2236 | float | RD | mean value positive sequence current |
| 2238 | float | RD | mean value negative sequence current |
| 2240 | float | RD | mean value distortion power L1 |
| 2242 | float | RD | mean value distortion power L2 |
| 2244 | float | RD | mean value distortion power L3 |
| 2246 | float | RD | mean value distortion power sum |
| 2248 | float | RD | mean value TDD (total demand distortion) current L1 |
| 2250 | float | RD | mean value TDD (total demand distortion) current L2 |
| 2252 | float | RD | mean value TDD (total demand distortion) current L3 |

Mean values, type short

| Address | Format | RD/WR | Note |
|---------|---------------|-------|--|
| 12000 | short (x10) | RD | mean value voltage L1-N |
| 12001 | short (x10) | RD | mean value voltage L2-N |
| 12002 | short (x10) | RD | mean value voltage L3-N |
| 12003 | short (x10) | RD | mean value voltage L1-L2 |
| 12004 | short (x10) | RD | mean value voltage L2-L3 |
| 12005 | short (x10) | RD | mean value voltage L3-L1 |
| 12006 | short (x1000) | RD | mean value current L1 |
| 12007 | short (x1000) | RD | mean value current L2 |
| 12008 | short (x1000) | RD | mean value current L3 |
| 12009 | short (x1000) | RD | mean value current sum |
| 12010 | short (x10) | RD | mean value active power L1 |
| 12011 | short (x10) | RD | mean value active power L2 |
| 12012 | short (x10) | RD | mean value active power L3 |
| 12013 | short | RD | mean value active power sum |
| 12014 | short (x10) | RD | mean value reactive power L1 |
| 12015 | short (x10) | RD | mean value reactive power L2 |
| 12016 | short (x10) | RD | mean value reactive power L3 |
| 12017 | short | RD | mean value reactive power sum |
| 12018 | short (x10) | RD | mean value apparent power L1 |
| 12019 | short (x10) | RD | mean value apparent power L2 |
| 12020 | short (x10) | RD | mean value apparent power L3 |
| 12021 | short | RD | mean value apparent power sum |
| 12022 | short (x1000) | RD | mean value cos(phi) L1 |
| 12023 | short (x1000) | RD | mean value cos(phi) L2 |
| 12024 | short (x1000) | RD | mean value cos(phi) L3 |
| 12025 | short (x1000) | RD | mean value cos(phi) sum |
| 12026 | short (x10) | RD | mean value active power der fundamental oscillation L1 |
| 12027 | short (x10) | RD | mean value active power der fundamental oscillation L2 |
| 12028 | short (x10) | RD | mean value active power der fundamental oscillation L3 |
| 12107 | short (x100) | RD | mean value THD voltage L1 |
| 12108 | short (x100) | RD | mean value THD voltage L2 |
| 12109 | short (x100) | RD | mean value THD voltage L3 |
| 12110 | short (x100) | RD | mean value THD current L1 |
| 12111 | short (x100) | RD | mean value THD current L2 |
| 12112 | short (x100) | RD | mean value THD current L3 |
| 12113 | short | RD | mean value frequency |
| 12114 | short | RD | mean value zero sequence voltage |
| 12115 | short | RD | mean value positive sequence voltage |
| 12116 | short | RD | mean value negative sequence voltage |
| 12117 | short | RD | mean value zero sequence current |
| 12118 | short | RD | mean value positive sequence current |
| 12119 | short | RD | mean value negative sequence current |
| 12120 | short (x10) | RD | mean value distortion power L1 |
| 12121 | short (x10) | RD | mean value distortion power L2 |
| 12122 | short (x10) | RD | mean value distortion power L3 |
| 12123 | short | RD | mean value distortion power sum |

Minimum values, type float

| Address | Format | RD/WR | Note |
|---------|--------|-------|---------------------------------------|
| 4000 | float | RD | min. value, voltage L1-N |
| 4002 | float | RD | min. value, voltage L2-N |
| 4004 | float | RD | min. value, voltage L3-N |
| 4006 | float | RD | min. value, voltage L1-L2 |
| 4008 | float | RD | min. value, voltage L1-L3 |
| 4010 | float | RD | min. value, voltage L3-L1 |
| 4012 | float | RD | min. value, cos(phi) L1 |
| 4014 | float | RD | min. value, cos(phi) L2 |
| 4016 | float | RD | min. value, cos(phi) L3 |
| 4018 | float | RD | min. value, cos(phi) sum |
| 4098 | float | RD | min. value, THD voltage L1 |
| 4100 | float | RD | min. value, THD voltage L2 |
| 4102 | float | RD | min. value, THD voltage L3 |
| 4104 | float | RD | min. value, frequency |
| 4106 | float | RD | min. value, voltage zero sequence |
| 4108 | float | RD | min. value, voltage positive sequence |
| 4110 | float | RD | min. value, voltage negative sequence |
| 4112 | float | RD | min. value, active power L1 |
| 4114 | float | RD | min. value, active power L2 |
| 4116 | float | RD | min. value, active power L3 |
| 4118 | float | RD | min. value, active power sum |

Minimum values, type short

| Address | Format | RD/WR | Note |
|---------|---------------|-------|---------------------------------------|
| 14000 | short (x10) | RD | min. value, voltage L1-N |
| 14001 | short (x10) | RD | min. value, voltage L2-N |
| 14002 | short (x10) | RD | min. value, voltage L3-N |
| 14003 | short (x10) | RD | min. value, voltage L1-L2 |
| 14004 | short (x10) | RD | min. value, voltage L1-L3 |
| 14005 | short (x10) | RD | min. value, voltage L3-L1 |
| 14006 | short (x1000) | RD | min. value, cos(phi) L1 |
| 14007 | short (x1000) | RD | min. value, cos(phi) L2 |
| 14008 | short (x1000) | RD | min. value, cos(phi) L3 |
| 14009 | short (x1000) | RD | min. value, cos(phi) sum |
| 14049 | short (x100) | RD | min. value, THD voltage L1 |
| 14050 | short (x100) | RD | min. value, THD voltage L2 |
| 14051 | short (x100) | RD | min. value, THD voltage L3 |
| 14052 | short | RD | min. value, frequency |
| 14053 | short | RD | min. value, voltage zero sequence |
| 14054 | short | RD | min. value, voltage positive sequence |
| 14055 | short | RD | min. value, voltage negative sequence |
| 14056 | short (x10) | RD | min. value, active power L1 |
| 14057 | short (x10) | RD | min. value, active power L2 |
| 14058 | short (x10) | RD | min. value, active power L3 |
| 14059 | short (x10) | RD | min. value, active power sum |

Maximum values, type float

| Address | Format | RD/WR | Note |
|---------|--------|-------|--|
| 3000 | float | RD | max. value, voltage L1-N |
| 3002 | float | RD | max. value, voltage L2-N |
| 3004 | float | RD | max. value, voltage L3-N |
| 3006 | float | RD | max. value, voltage L1-L2 |
| 3008 | float | RD | max. value, voltage L2-L3 |
| 3010 | float | RD | max. value, voltage L3-L1 |
| 3012 | float | RD | max. value, current L1 |
| 3014 | float | RD | max. value, current L2 |
| 3016 | float | RD | max. value, current L3 |
| 3018 | float | RD | max. value, current sum |
| 3020 | float | RD | max. value, active power L1 |
| 3022 | float | RD | max. value, active power L2 |
| 3024 | float | RD | max. value, active power L3 |
| 3026 | float | RD | max. value, active power sum |
| 3028 | float | RD | max. value, reactive power L1 |
| 3030 | float | RD | max. value, reactive power L2 |
| 3032 | float | RD | max. value, reactive power L3 |
| 3034 | float | RD | max. value, reactive power sum |
| 3036 | float | RD | max. value, apparent power L1 |
| 3038 | float | RD | max. value, apparent power L2 |
| 3040 | float | RD | max. value, apparent power L3 |
| 3042 | float | RD | max. value, apparent power sum |
| 3044 | float | RD | max. value, cos(phi) L1 |
| 3046 | float | RD | max. value, cos(phi) L2 |
| 3048 | float | RD | max. value, cos(phi) L3 |
| 3050 | float | RD | max. value, cos(phi) sum |
| 3052 | float | RD | max. value, active power, fundamental oscillation L1 |
| 3054 | float | RD | max. value, active power, fundamental oscillation L2 |
| 3056 | float | RD | max. value, active power, fundamental oscillation L3 |
| 3214 | float | RD | max. value, THD voltage L1 |
| 3216 | float | RD | max. value, THD voltage L2 |
| 3218 | float | RD | max. value, THD voltage L3 |
| 3220 | float | RD | max. value, THD current L1 |
| 3222 | float | RD | max. value, THD current L2 |
| 3224 | float | RD | max. value, THD current L3 |
| 3226 | float | RD | max. value, frequency |
| 3228 | float | RD | max. value, voltage zero sequence |
| 3230 | float | RD | max. value, voltage positive sequence |
| 3232 | float | RD | max. value, voltage negative sequence |
| 3234 | float | RD | max. value, current zero sequence |
| 3236 | float | RD | max. value, current positive sequence |
| 3238 | float | RD | max. value, current negative sequence |
| 3240 | float | RD | max. value, distortion power L1 |
| 3242 | float | RD | max. value, distortion power L2 |
| 3244 | float | RD | max. value, distortion power L3 |
| 3246 | float | RD | max. value, distortion power sum |
| 3264 | float | RD | max. value, TDD current L1 |
| 3266 | float | RD | max. value, TDD current L2 |
| 3268 | float | RD | max. value, TDD current L3 |

Maximum values, type short

| Address | Format | RD/WR | Note |
|---------|---------------|-------|---|
| 13000 | short (x10) | RD | max. value, voltage L1-N |
| 13001 | short (x10) | RD | max. value, voltage L2-N |
| 13002 | short (x10) | RD | max. value, voltage L3-N |
| 13003 | short (x10) | RD | max. value, voltage L1-L2 |
| 13004 | short (x10) | RD | max. value, voltage L2-L3 |
| 13005 | short (x10) | RD | max. value, voltage L3-L1 |
| 13006 | short (x1000) | RD | max. value, current L1 |
| 13007 | short (x1000) | RD | max. value, current L2 |
| 13008 | short (x1000) | RD | max. value, current L3 |
| 13009 | short (x1000) | RD | max. value, current sum |
| 13010 | short (x10) | RD | max. value, active power L1 |
| 13011 | short (x10) | RD | max. value, active power L2 |
| 13012 | short (x10) | RD | max. value, active power L3 |
| 13013 | short | RD | max. value, active power sum |
| 13014 | short (x10) | RD | max. value, reactive power L1 |
| 13015 | short (x10) | RD | max. value, reactive power L2 |
| 13016 | short (x10) | RD | max. value, reactive power L3 |
| 13017 | short | RD | max. value, reactive power sum |
| 13018 | short (x10) | RD | max. value, apparent power L1 |
| 13019 | short (x10) | RD | max. value, apparent power L2 |
| 13020 | short (x10) | RD | max. value, apparent power L3 |
| 13021 | short | RD | max. value, apparent power sum |
| 13022 | short (x1000) | RD | max. value, cos(phi) L1 |
| 13023 | short (x1000) | RD | max. value, cos(phi) L2 |
| 13024 | short (x1000) | RD | max. value, cos(phi) L3 |
| 13025 | short (x1000) | RD | max. value, cos(phi) sum |
| 13026 | short (x10) | RD | max. value, active power der fundamental oscillation L1 |
| 13027 | short (x10) | RD | max. value, active power der fundamental oscillation L2 |
| 13028 | short (x10) | RD | max. value, active power der fundamental oscillation L3 |
| 13107 | short (x100) | RD | max. value, THD voltage L1 |
| 13108 | short (x100) | RD | max. value, THD voltage L2 |
| 13109 | short (x100) | RD | max. value, THD voltage L3 |
| 13110 | short (x100) | RD | max. value, THD current L1 |
| 13111 | short (x100) | RD | max. value, THD current L2 |
| 13112 | short (x100) | RD | max. value, THD current L3 |
| 13113 | short | RD | max. value, frequency |
| 13114 | short | RD | max. value, voltage zero sequence |
| 13115 | short | RD | max. value, voltage positive sequence |
| 13116 | short | RD | max. value, voltage negative sequence |
| 13117 | short | RD | max. value, current zero sequence |
| 13118 | short | RD | max. value, current positive sequence |
| 13119 | short | RD | max. value, current negative sequence |
| 13120 | short (x10) | RD | max. value, distortion power L1 |
| 13121 | short (x10) | RD | max. value, distortion power L2 |
| 13122 | short (x10) | RD | max. value, distortion power L3 |
| 13123 | short | RD | max. value, distortion power sum |

Maximum values of mean values, type float

| Address | Format | RD/WR | Note |
|---------|--------|-------|-------------------------------------|
| 3248 | float | RD | max. of mean value current L1 |
| 3250 | float | RD | max. of mean value current L2 |
| 3252 | float | RD | max. of mean value current L3 |
| 3254 | float | RD | max. of mean value current sum |
| 3256 | float | RD | max. of mean value active power L1 |
| 3258 | float | RD | max. of mean value active power L2 |
| 3260 | float | RD | max. of mean value active power L3 |
| 3262 | float | RD | max. of mean value active power sum |

Maximum values of mean values, type short

| Address | Format | RD/WR | Note |
|---------|---------------|-------|-------------------------------------|
| 13124 | short (x1000) | RD | max. of mean value current L1 |
| 13125 | short (x1000) | RD | max. of mean value current L2 |
| 13126 | short (x1000) | RD | max. of mean value current L3 |
| 13128 | short (x10) | RD | max. of mean values active power L1 |
| 13129 | short (x10) | RD | max. of mean values active power L2 |
| 13130 | short (x10) | RD | max. of mean values active power L3 |

Energy, type float

| Address | Format | RD/WR | Note |
|---------|--------|-------|--|
| 5000 | float | RD | active energy L1, consumed |
| 5002 | float | RD | active energy L2, consumed |
| 5004 | float | RD | active energy L3, consumed |
| 5006 | float | RD | active energy sum, consumed |
| 5008 | float | RD | active energy L1, consumed, HT |
| 5010 | float | RD | active energy L2, consumed, HT |
| 5012 | float | RD | active energy L3, consumed, HT |
| 5014 | float | RD | active energy sum, consumed, HT |
| 5016 | float | RD | active energy L1, consumed, NT |
| 5018 | float | RD | active energy L2, consumed, NT |
| 5020 | float | RD | active energy L3, consumed, NT |
| 5022 | float | RD | active energy sum, consumed, NT |
| 5024 | float | RD | apparent energy L1 |
| 5026 | float | RD | apparent energy L2 |
| 5028 | float | RD | apparent energy L3 |
| 5030 | float | RD | apparent energy, total |
| 5032 | float | RD | apparent energy L1, HT |
| 5034 | float | RD | apparent energy L2, HT |
| 5036 | float | RD | apparent energy L3, HT |
| 5038 | float | RD | apparent energy, total, HT |
| 5040 | float | RD | apparent energy L1, NT |
| 5042 | float | RD | apparent energy L2, NT |
| 5044 | float | RD | apparent energy L3, NT |
| 5046 | float | RD | apparent energy, total, NT |
| 5048 | float | RD | reactive energy L1, inductive |
| 5050 | float | RD | reactive energy L2, inductive |
| 5052 | float | RD | reactive energy L3, inductive |
| 5054 | float | RD | reactive energy sum, inductive |
| 5056 | float | RD | reactive energy L1, inductive, HT |
| 5058 | float | RD | reactive energy L2, inductive, HT |
| 5060 | float | RD | reactive energy L3, inductive, HT |
| 5062 | float | RD | reactive energy, total, inductive, HT |
| 5064 | float | RD | reactive energy L1, inductive, NT |
| 5066 | float | RD | reactive energy L2, inductive, NT |
| 5068 | float | RD | reactive energy L3, inductive, NT |
| 5070 | float | RD | reactive energy, total, inductive, NT |
| 5072 | float | RD | active energy L1, delivered |
| 5074 | float | RD | active energy L2, delivered |
| 5076 | float | RD | active energy L3, delivered |
| 5078 | float | RD | active energy sum, delivered |
| 5080 | float | RD | reactive energy L1, capacitive |
| 5082 | float | RD | reactive energy L2, capacitive |
| 5084 | float | RD | reactive energy L3, capacitive |
| 5086 | float | RD | reactive energy sum, capacitive |
| 5088 | float | RD | active energy sum, without return travel block |
| 5090 | float | RD | reactive energy sum, without return travel block |
| 5092 | float | RD | reactive energy L1, inductive, consumed |
| 5094 | float | RD | reactive energy L2, inductive, consumed |
| 5096 | float | RD | reactive energy L3, inductive, consumed |
| 5098 | float | RD | reactive energy sum, inductive, consumed |
| 5100 | float | RD | reactive energy L1, capacitive, consumed |
| 5102 | float | RD | reactive energy L2, capacitive, consumed |
| 5104 | float | RD | reactive energy L3, capacitive, consumed |
| 5106 | float | RD | reactive energy sum, capacitive, consumed |
| 5108 | float | RD | reactive energy L1, inductive, delivered |
| 5110 | float | RD | reactive energy L2, inductive, delivered |
| 5112 | float | RD | reactive energy L3, inductive, delivered |
| 5114 | float | RD | reactive energy sum, inductive, delivered |
| 5116 | float | RD | reactive energy L1, capacitive, delivered |

| Address | Format | RD/WR | Note |
|---------|--------|-------|---|
| 5118 | float | RD | reactive energy L2, capacitive, delivered |
| 5120 | float | RD | reactive energy L3, capacitive, delivered |
| 5122 | float | RD | reactive energy sum, capacitive, delivered |
| 5124 | float | RD | active energy (consumed), max. monthly value, jan., even year |
| 5126 | float | RD | active energy (consumed), max. monthly value, feb., even year |
| 5128 | float | RD | active energy (consumed), max. monthly value, mar., even year |
| 5130 | float | RD | active energy (consumed), max. monthly value, apr., even year |
| 5132 | float | RD | active energy (consumed), max. monthly value, may., even year |
| 5134 | float | RD | active energy (consumed), max. monthly value, jun., even year |
| 5136 | float | RD | active energy (consumed), max. monthly value, jul., even year |
| 5138 | float | RD | active energy (consumed), max. monthly value, aug., even year |
| 5140 | float | RD | active energy (consumed), max. monthly value, sep., even year |
| 5142 | float | RD | active energy (consumed), max. monthly value, oct., even year |
| 5144 | float | RD | active energy (consumed), max. monthly value, nov., even year |
| 5146 | float | RD | active energy (consumed), max. monthly value, dec., even year |
| 5148 | float | RD | active energy (consumed), max. monthly value, jan., uneven year |
| 5150 | float | RD | active energy (consumed), max. monthly value, feb., uneven year |
| 5152 | float | RD | active energy (consumed), max. monthly value, mar., uneven year |
| 5154 | float | RD | active energy (consumed), max. monthly value, apr., uneven year |
| 5156 | float | RD | active energy (consumed), max. monthly value, may., uneven year |
| 5158 | float | RD | active energy (consumed), max. monthly value, jun., uneven year |
| 5160 | float | RD | active energy (consumed), max. monthly value, jul., uneven year |
| 5162 | float | RD | active energy (consumed), max. monthly value, aug., uneven year |
| 5164 | float | RD | active energy (consumed), max. monthly value, sep., uneven year |
| 5166 | float | RD | active energy (consumed), max. monthly value, oct., uneven year |
| 5168 | float | RD | active energy (consumed), max. monthly value, nov., uneven year |
| 5170 | float | RD | active energy (consumed), max. monthly value, dec., uneven year |
| 5172 | float | RD | apparent energy, max. monthly value, jan., even year |
| 5174 | float | RD | apparent energy, max. monthly value, feb., even year |
| 5176 | float | RD | apparent energy, max. monthly value, mar., even year |
| 5178 | float | RD | apparent energy, max. monthly value, apr., even year |
| 5180 | float | RD | apparent energy, max. monthly value, may., even year |
| 5182 | float | RD | apparent energy, max. monthly value, jun., even year |
| 5184 | float | RD | apparent energy, max. monthly value, jul., even year |
| 5186 | float | RD | apparent energy, max. monthly value, aug., even year |
| 5188 | float | RD | apparent energy, max. monthly value, sep., even year |
| 5190 | float | RD | apparent energy, max. monthly value, oct., even year |
| 5192 | float | RD | apparent energy, max. monthly value, nov., even year |
| 5194 | float | RD | apparent energy, max. monthly value, dec., even year |
| 5196 | float | RD | apparent energy, max. monthly value, jan., uneven year |
| 5198 | float | RD | apparent energy, max. monthly value, feb., uneven year |
| 5200 | float | RD | apparent energy, max. monthly value, mar., uneven year |
| 5202 | float | RD | apparent energy, max. monthly value, apr., uneven year |
| 5204 | float | RD | apparent energy, max. monthly value, may., uneven year |
| 5206 | float | RD | apparent energy, max. monthly value, jun., uneven year |
| 5208 | float | RD | apparent energy, max. monthly value, jul., uneven year |
| 5210 | float | RD | apparent energy, max. monthly value, aug., uneven year |
| 5212 | float | RD | apparent energy, max. monthly value, sep., uneven year |
| 5214 | float | RD | apparent energy, max. monthly value, oct., uneven year |
| 5216 | float | RD | apparent energy, max. monthly value, nov., uneven year |
| 5218 | float | RD | apparent energy, max. monthly value, dec., uneven year |
| 5220 | float | RD | reactive energy (ind.), max. monthly value, jan., even year |
| 5222 | float | RD | reactive energy (ind.), max. monthly value, feb., even year |
| 5224 | float | RD | reactive energy (ind.), max. monthly value, mar., even year |
| 5226 | float | RD | reactive energy (ind.), max. monthly value, apr., even year |
| 5228 | float | RD | reactive energy (ind.), max. monthly value, may., even year |
| 5230 | float | RD | reactive energy (ind.), max. monthly value, jun., even year |
| 5232 | float | RD | reactive energy (ind.), max. monthly value, jul., even year |
| 5234 | float | RD | reactive energy (ind.), max. monthly value, aug., even year |

| Address | Format | RD/WR | Note |
|---------|--------|-------|---|
| 5236 | float | RD | reactive energy (ind.), max. monthly value, sep., even year |
| 5238 | float | RD | reactive energy (ind.), max. monthly value, oct., even year |
| 5240 | float | RD | reactive energy (ind.), max. monthly value, nov., even year |
| 5242 | float | RD | reactive energy (ind.), max. monthly value, dec., even year |
| 5244 | float | RD | reactive energy (ind.), max. monthly value, jan., uneven year |
| 5246 | float | RD | reactive energy (ind.), max. monthly value, feb., uneven year |
| 5248 | float | RD | reactive energy (ind.), max. monthly value, mar., uneven year |
| 5250 | float | RD | reactive energy (ind.), max. monthly value, apr., uneven year |
| 5252 | float | RD | reactive energy (ind.), max. monthly value, may., uneven year |
| 5254 | float | RD | reactive energy (ind.), max. monthly value, jun., uneven year |
| 5256 | float | RD | reactive energy (ind.), max. monthly value, jul., uneven year |
| 5258 | float | RD | reactive energy (ind.), max. monthly value, aug., uneven year |
| 5260 | float | RD | reactive energy (ind.), max. monthly value, sep., uneven year |
| 5262 | float | RD | reactive energy (ind.), max. monthly value, oct., uneven year |
| 5264 | float | RD | reactive energy (ind.), max. monthly value, nov., uneven year |
| 5266 | float | RD | reactive energy (ind.), max. monthly value, dec., uneven year |

Energy, type integer

The energy values in integer format do not provide any current- and voltage transformer ratios.

| Address | Format | RD/WR | Note |
|---------|--------|-------|--|
| 15000 | int | RD | active energy L1, consumed |
| 15002 | int | RD | active energy L2, consumed |
| 15004 | int | RD | active energy L3, consumed |
| 15006 | int | RD | active energy sum, consumed |
| 15008 | int | RD | active energy L1, consumed, HT |
| 15010 | int | RD | active energy L2, consumed, HT |
| 15012 | int | RD | active energy L3, consumed, HT |
| 15014 | int | RD | active energy sum, consumed, HT |
| 15016 | int | RD | active energy L1, consumed, NT |
| 15018 | int | RD | active energy L2, consumed, NT |
| 15020 | int | RD | active energy L3, consumed, NT |
| 15022 | int | RD | active energy sum, consumed, NT |
| 15024 | int | RD | apparent energy L1 |
| 15026 | int | RD | apparent energy L2 |
| 15028 | int | RD | apparent energy L3 |
| 15030 | int | RD | apparent energy, total |
| 15032 | int | RD | apparent energy L1, HT |
| 15034 | int | RD | apparent energy L2, HT |
| 15036 | int | RD | apparent energy L3, HT |
| 15038 | int | RD | apparent energy, total, HT |
| 15040 | int | RD | apparent energy L1, NT |
| 15042 | int | RD | apparent energy L2, NT |
| 15044 | int | RD | apparent energy L3, NT |
| 15046 | int | RD | apparent energy, total, NT |
| 15048 | int | RD | reactive energy L1, inductive |
| 15050 | int | RD | reactive energy L2, inductive |
| 15052 | int | RD | reactive energy L3, inductive |
| 15054 | int | RD | reactive energy sum, inductive |
| 15056 | int | RD | reactive energy L1, inductive, HT |
| 15058 | int | RD | reactive energy L2, inductive, HT |
| 15060 | int | RD | reactive energy L3, inductive, HT |
| 15062 | int | RD | reactive energy, total, inductive, HT |
| 15064 | int | RD | reactive energy L1, inductive, NT |
| 15066 | int | RD | reactive energy L2, inductive, NT |
| 15068 | int | RD | reactive energy L3, inductive, NT |
| 15070 | int | RD | reactive energy, total, inductive, NT |
| 15072 | int | RD | active energy, delivered |
| 15074 | int | RD | active energy L2, delivered |
| 15076 | int | RD | active energy L3, delivered |
| 15078 | int | RD | active energy sum, delivered |
| 15080 | int | RD | reactive energy L1, inductive, consumed |
| 15082 | int | RD | reactive energy L2, inductive, consumed |
| 15084 | int | RD | reactive energy L3, inductive, consumed |
| 15086 | int | RD | reactive energy sum, inductive, consumed |
| 15088 | int | RD | active energy sum, without return travel block |
| 15090 | int | RD | reactive energy sum, without return travel block |
| 15092 | int | RD | reactive energy L1, inductive, consumed |
| 15094 | int | RD | reactive energy L2, inductive, consumed |
| 15096 | int | RD | reactive energy L3, inductive, consumed |
| 15098 | int | RD | reactive energy sum, inductive, consumed |
| 15100 | int | RD | reactive energy L1, capacitive, consumed |
| 15102 | int | RD | reactive energy L2, capacitive, consumed |
| 15104 | int | RD | reactive energy L3, capacitive, consumed |
| 15106 | int | RD | reactive energy sum, capacitive, consumed |
| 15108 | int | RD | reactive energy L1, inductive, delivered |
| 15110 | int | RD | reactive energy L2, inductive, delivered |
| 15112 | int | RD | reactive energy L3, inductive, delivered |
| 15114 | int | RD | reactive energy sum, inductive, delivered |
| 15116 | int | RD | reactive energy L1, capacitive, delivered |

| Address | Format | RD/WR | Note |
|---------|--------|-------|---|
| 15118 | int | RD | reactive energy L2, capacitive, delivered |
| 15120 | int | RD | reactive energy L3, capacitive, delivered |
| 15122 | int | RD | reactive energy sum, capacitive, delivered |
| 15124 | int | RD | active energy (consumed), max. monthly value, jan., even year |
| 15126 | int | RD | active energy (consumed), max. monthly value, feb., even year |
| 15128 | int | RD | active energy (consumed), max. monthly value, mar., even year |
| 15130 | int | RD | active energy (consumed), max. monthly value, apr., even year |
| 15132 | int | RD | active energy (consumed), max. monthly value, may., even year |
| 15134 | int | RD | active energy (consumed), max. monthly value, jun., even year |
| 15136 | int | RD | active energy (consumed), max. monthly value, jul., even year |
| 15138 | int | RD | active energy (consumed), max. monthly value, aug., even year |
| 15140 | int | RD | active energy (consumed), max. monthly value, sep., even year |
| 15142 | int | RD | active energy (consumed), max. monthly value, oct., even year |
| 15144 | int | RD | active energy (consumed), max. monthly value, nov., even year |
| 15146 | int | RD | active energy (consumed), max. monthly value, dec., even year |
| 15148 | int | RD | active energy (consumed), max. monthly value, jan., uneven year |
| 15150 | int | RD | active energy (consumed), max. monthly value, feb., uneven year |
| 15152 | int | RD | active energy (consumed), max. monthly value, mar., uneven year |
| 15154 | int | RD | active energy (consumed), max. monthly value, apr., uneven year |
| 15156 | int | RD | active energy (consumed), max. monthly value, may., uneven year |
| 15158 | int | RD | active energy (consumed), max. monthly value, jun., uneven year |
| 15160 | int | RD | active energy (consumed), max. monthly value, jul., uneven year |
| 15162 | int | RD | active energy (consumed), max. monthly value, aug., uneven year |
| 15164 | int | RD | active energy (consumed), max. monthly value, sep., uneven year |
| 15166 | int | RD | active energy (consumed), max. monthly value, oct., uneven year |
| 15168 | int | RD | active energy (consumed), max. monthly value, nov., uneven year |
| 15170 | int | RD | active energy (consumed), max. monthly value, dec., uneven year |
| 15192 | int | RD | apparent energy, max. monthly value, jan., even year |
| 15194 | int | RD | apparent energy, max. monthly value, feb., even year |
| 15196 | int | RD | apparent energy, max. monthly value, mar., even year |
| 15198 | int | RD | apparent energy, max. monthly value, apr., even year |
| 15200 | int | RD | apparent energy, max. monthly value, may., even year |
| 15202 | int | RD | apparent energy, max. monthly value, jun., even year |
| 15204 | int | RD | apparent energy, max. monthly value, jul., even year |
| 15206 | int | RD | apparent energy, max. monthly value, aug., even year |
| 15208 | int | RD | apparent energy, max. monthly value, sep., even year |
| 15210 | int | RD | apparent energy, max. monthly value, oct., even year |
| 15212 | int | RD | apparent energy, max. monthly value, nov., even year |
| 15214 | int | RD | apparent energy, max. monthly value, dec., even year |
| 15216 | int | RD | apparent energy, max. monthly value, jan., uneven year |
| 15218 | int | RD | apparent energy, max. monthly value, feb., uneven year |
| 15220 | int | RD | apparent energy, max. monthly value, mar., uneven year |
| 15222 | int | RD | apparent energy, max. monthly value, apr., uneven year |
| 15224 | int | RD | apparent energy, max. monthly value, may., uneven year |
| 15226 | int | RD | apparent energy, max. monthly value, jun., uneven year |
| 15228 | int | RD | apparent energy, max. monthly value, jul., uneven year |
| 15230 | int | RD | apparent energy, max. monthly value, aug., uneven year |
| 15232 | int | RD | apparent energy, max. monthly value, sep., uneven year |
| 15234 | int | RD | apparent energy, max. monthly value, oct., uneven year |
| 15236 | int | RD | apparent energy, max. monthly value, nov., uneven year |
| 15238 | int | RD | apparent energy, max. monthly value, dec., uneven year |
| 15240 | int | RD | reactive energy (ind.), max. monthly value, jan., even year |
| 15242 | int | RD | reactive energy (ind.), max. monthly value, feb., even year |
| 15244 | int | RD | reactive energy (ind.), max. monthly value, mar., even year |
| 15246 | int | RD | reactive energy (ind.), max. monthly value, apr., even year |
| 15248 | int | RD | reactive energy (ind.), max. monthly value, may., even year |
| 15250 | int | RD | reactive energy (ind.), max. monthly value, jun., even year |
| 15252 | int | RD | reactive energy (ind.), max. monthly value, jul., even year |
| 15254 | int | RD | reactive energy (ind.), max. monthly value, aug., even year |

| Address | Format | RD/WR | Note |
|---------|--------|-------|---|
| 15256 | int | RD | reactive energy (ind.), max. monthly value, sep., even year |
| 15258 | int | RD | reactive energy (ind.), max. monthly value, oct., even year |
| 15260 | int | RD | reactive energy (ind.), max. monthly value, nov., even year |
| 15262 | int | RD | reactive energy (ind.), max. monthly value, dec., even year |
| 15264 | int | RD | reactive energy (ind.), max. monthly value, jan., uneven year |
| 15266 | int | RD | reactive energy (ind.), max. monthly value, feb., uneven year |
| 15268 | int | RD | reactive energy (ind.), max. monthly value, mar., uneven year |
| 15270 | int | RD | reactive energy (ind.), max. monthly value, apr., uneven year |
| 15272 | int | RD | reactive energy (ind.), max. monthly value, may., uneven year |
| 15274 | int | RD | reactive energy (ind.), max. monthly value, jun., uneven year |
| 15276 | int | RD | reactive energy (ind.), max. monthly value, jul., uneven year |
| 15278 | int | RD | reactive energy (ind.), max. monthly value, aug., uneven year |
| 15280 | int | RD | reactive energy (ind.), max. monthly value, sep., uneven year |
| 15282 | int | RD | reactive energy (ind.), max. monthly value, oct., uneven year |
| 15284 | int | RD | reactive energy (ind.), max. monthly value, nov., uneven year |
| 15286 | int | RD | reactive energy (ind.), max. monthly value, dec., uneven year |

Energy, type double

| Address | Format | RD/WR | Note |
|---------|--------|-------|--|
| 6000 | double | RD/RW | active energy L1, consumed |
| 6004 | double | RD/RW | active energy L2, consumed |
| 6008 | double | RD/RW | active energy L3, consumed |
| 6012 | double | RD/RW | active energy sum, consumed |
| 6016 | double | RD/RW | active energy L1, consumed, HT |
| 6020 | double | RD/RW | active energy L2, consumed, HT |
| 6024 | double | RD/RW | active energy L3, consumed, HT |
| 6028 | double | RD/RW | active energy sum, consumed, HT |
| 6032 | double | RD/RW | active energy L1, consumed, NT |
| 6036 | double | RD/RW | active energy L2, consumed, NT |
| 6040 | double | RD/RW | active energy L3, consumed, NT |
| 6044 | double | RD/RW | active energy sum, consumed, NT |
| 6048 | double | RD/RW | apparent energy L1 |
| 6052 | double | RD/RW | apparent energy L2 |
| 6056 | double | RD/RW | apparent energy L3 |
| 6060 | double | RD/RW | apparent energy, total |
| 6064 | double | RD/RW | apparent energy L1, HT |
| 6068 | double | RD/RW | apparent energy L2, HT |
| 6072 | double | RD/RW | apparent energy L3, HT |
| 6076 | double | RD/RW | apparent energy, total, HT |
| 6080 | double | RD/RW | apparent energy L1, NT |
| 6084 | double | RD/RW | apparent energy L2, NT |
| 6088 | double | RD/RW | apparent energy L3, NT |
| 6092 | double | RD/RW | apparent energy, total, NT |
| 6096 | double | RD/RW | reactive energy L1, inductive |
| 6100 | double | RD/RW | reactive energy L2, inductive |
| 6104 | double | RD/RW | reactive energy L3, inductive |
| 6108 | double | RD/RW | reactive energy sum, inductive |
| 6112 | double | RD/RW | reactive energy L1, inductive, HT |
| 6116 | double | RD/RW | reactive energy L2, inductive, HT |
| 6120 | double | RD/RW | reactive energy L3, inductive, HT |
| 6124 | double | RD/RW | reactive energy, total, inductive, HT |
| 6128 | double | RD/RW | reactive energy L1, inductive, NT |
| 6132 | double | RD/RW | reactive energy L2, inductive, NT |
| 6136 | double | RD/RW | reactive energy L3, inductive, NT |
| 6140 | double | RD/RW | reactive energy, total, inductive, NT |
| 6144 | double | RD/RW | active energy, delivered |
| 6148 | double | RD/RW | active energy L2, delivered |
| 6152 | double | RD/RW | active energy L3, delivered |
| 6156 | double | RD/RW | active energy sum, delivered |
| 6160 | double | RD/RW | reactive energy L1, capacitive |
| 6164 | double | RD/RW | reactive energy L2, capacitive |
| 6168 | double | RD/RW | reactive energy L3, capacitive |
| 6172 | double | RD/RW | reactive energy sum, capacitive |
| 6176 | double | RD/RW | active energy sum, without return travel block |
| 6180 | double | RD/RW | reactive energy sum, without return travel block |
| 6184 | double | RD/RW | reactive energy L1, inductive, consumed |
| 6188 | double | RD/RW | reactive energy L2, inductive, consumed |
| 6192 | double | RD/RW | reactive energy L3, inductive, consumed |
| 6196 | double | RD/RW | reactive energy sum, inductive, consumed |
| 6200 | double | RD/RW | reactive energy L1, capacitive, consumed |
| 6204 | double | RD/RW | reactive energy L2, capacitive, consumed |
| 6208 | double | RD/RW | reactive energy L3, capacitive, consumed |
| 6212 | double | RD/RW | reactive energy sum, capacitive, consumed |
| 6216 | double | RD/RW | reactive energy L1, inductive, delivered |
| 6220 | double | RD/RW | reactive energy L2, inductive, delivered |
| 6224 | double | RD/RW | reactive energy L3, inductive, delivered |
| 6228 | double | RD/RW | reactive energy sum, inductive, delivered |
| 6232 | double | RD/RW | reactive energy L1, capacitive, delivered |

| Address | Format | RD/RW | Note |
|---------|--------|-------|---|
| 6236 | double | RD/RW | reactive energy L2, capacitive, delivered |
| 6240 | double | RD/RW | reactive energy L3, capacitive, delivered |
| 6244 | double | RD/RW | reactive energy sum, capacitive, delivered |
| 6248 | double | RD | active energy (consumed), max. monthly value, jan., even year |
| 6252 | double | RD | active energy (consumed), max. monthly value, feb., even year |
| 6256 | double | RD | active energy (consumed), max. monthly value, mar., even year |
| 6260 | double | RD | active energy (consumed), max. monthly value, apr., even year |
| 6264 | double | RD | active energy (consumed), max. monthly value, may., even year |
| 6268 | double | RD | active energy (consumed), max. monthly value, jun., even year |
| 6272 | double | RD | active energy (consumed), max. monthly value, jul., even year |
| 6276 | double | RD | active energy (consumed), max. monthly value, aug., even year |
| 6280 | double | RD | active energy (consumed), max. monthly value, sep., even year |
| 6284 | double | RD | active energy (consumed), max. monthly value, oct., even year |
| 6288 | double | RD | active energy (consumed), max. monthly value, nov., even year |
| 6292 | double | RD | active energy (consumed), max. monthly value, dec., even year |
| 6296 | double | RD | active energy (consumed), max. monthly value, jan., uneven year |
| 6300 | double | RD | active energy (consumed), max. monthly value, feb., uneven year |
| 6304 | double | RD | active energy (consumed), max. monthly value, mar., uneven year |
| 6308 | double | RD | active energy (consumed), max. monthly value, apr., uneven year |
| 6312 | double | RD | active energy (consumed), max. monthly value, may., uneven year |
| 6316 | double | RD | active energy (consumed), max. monthly value, jun., uneven year |
| 6320 | double | RD | active energy (consumed), max. monthly value, jul., uneven year |
| 6324 | double | RD | active energy (consumed), max. monthly value, aug., uneven year |
| 6328 | double | RD | active energy (consumed), max. monthly value, sep., uneven year |
| 6332 | double | RD | active energy (consumed), max. monthly value, oct., uneven year |
| 6336 | double | RD | active energy (consumed), max. monthly value, nov., uneven year |
| 6340 | double | RD | active energy (consumed), max. monthly value, dec., uneven year |
| 6344 | double | RD | apparent energy, max. monthly value, jan., even year |
| 6348 | double | RD | apparent energy, max. monthly value, feb., even year |
| 6352 | double | RD | apparent energy, max. monthly value, mar., even year |
| 6356 | double | RD | apparent energy, max. monthly value, apr., even year |
| 6360 | double | RD | apparent energy, max. monthly value, may., even year |
| 6364 | double | RD | apparent energy, max. monthly value, jun., even year |
| 6368 | double | RD | apparent energy, max. monthly value, jul., even year |
| 6372 | double | RD | apparent energy, max. monthly value, aug., even year |
| 6376 | double | RD | apparent energy, max. monthly value, sep., even year |
| 6380 | double | RD | apparent energy, max. monthly value, oct., even year |
| 6384 | double | RD | apparent energy, max. monthly value, nov., even year |
| 6388 | double | RD | apparent energy, max. monthly value, dec., even year |
| 6392 | double | RD | apparent energy, max. monthly value, jan., uneven year |
| 6396 | double | RD | apparent energy, max. monthly value, feb., uneven year |
| 6400 | double | RD | apparent energy, max. monthly value, mar., uneven year |
| 6404 | double | RD | apparent energy, max. monthly value, apr., uneven year |
| 6408 | double | RD | apparent energy, max. monthly value, may., uneven year |
| 6412 | double | RD | apparent energy, max. monthly value, jun., uneven year |
| 6416 | double | RD | apparent energy, max. monthly value, jul., uneven year |
| 6420 | double | RD | apparent energy, max. monthly value, aug., uneven year |
| 6424 | double | RD | apparent energy, max. monthly value, sep., uneven year |
| 6428 | double | RD | apparent energy, max. monthly value, oct., uneven year |
| 6432 | double | RD | apparent energy, max. monthly value, nov., uneven year |
| 6436 | double | RD | apparent energy, max. monthly value, dec., uneven year |
| 6900 | double | RD | reactive energy (ind.), max. monthly value, jan., even year |
| 6904 | double | RD | reactive energy (ind.), max. monthly value, feb., even year |
| 6908 | double | RD | reactive energy (ind.), max. monthly value, mar., even year |
| 6912 | double | RD | reactive energy (ind.), max. monthly value, apr., even year |
| 6916 | double | RD | reactive energy (ind.), max. monthly value, may., even year |
| 6920 | double | RD | reactive energy (ind.), max. monthly value, jun., even year |

| Address | Format | RD/WR | Note |
|---------|--------|-------|---|
| 6924 | double | RD | reactive energy (ind.), max. monthly value, jul., even year |
| 6928 | double | RD | reactive energy (ind.), max. monthly value, aug., even year |
| 6932 | double | RD | reactive energy (ind.), max. monthly value, sep., even year |
| 6936 | double | RD | reactive energy (ind.), max. monthly value, oct., even year |
| 6940 | double | RD | reactive energy (ind.), max. monthly value, nov., even year |
| 6944 | double | RD | reactive energy (ind.), max. monthly value, dec., even year |
| 6948 | double | RD | reactive energy (ind.), max. monthly value, jan., uneven year |
| 6952 | double | RD | reactive energy (ind.), max. monthly value, feb., uneven year |
| 6956 | double | RD | reactive energy (ind.), max. monthly value, mar., uneven year |
| 6960 | double | RD | reactive energy (ind.), max. monthly value, apr., uneven year |
| 6964 | double | RD | reactive energy (ind.), max. monthly value, may., uneven year |
| 6968 | double | RD | reactive energy (ind.), max. monthly value, jun., uneven year |
| 6972 | double | RD | reactive energy (ind.), max. monthly value, jul., uneven year |
| 6976 | double | RD | reactive energy (ind.), max. monthly value, aug., uneven year |
| 6980 | double | RD | reactive energy (ind.), max. monthly value, sep., uneven year |
| 6984 | double | RD | reactive energy (ind.), max. monthly value, oct., uneven year |
| 6988 | double | RD | reactive energy (ind.), max. monthly value, nov., uneven year |
| 6992 | double | RD | reactive energy (ind.), max. monthly value, dec., uneven year |

Energy, type double (UMG 96-PA-MID)

| Address | Format | RD/WR | Bemerkung |
|---------|--------|-------|------------------------------|
| 6444 | double | RD | active energy sum, consumed |
| 6448 | double | RD | active energy sum, delivered |

| Address | Format | RD/WR | Note |
|---------|--------|-------|------|
|---------|--------|-------|------|

Peak indicator (drag indicator)

| Address | Format | RD/WR | Note |
|---------|--------|-------|--|
| 7000 | float | RD | highest value current L1 |
| 7002 | float | RD | highest value current L2 |
| 7004 | float | RD | highest value current L3 |
| 7006 | uint | RD | point in time, highest value current L1 |
| 7008 | uint | RD | point in time, highest value current L2 |
| 7010 | uint | RD | point in time, highest value current L3 |
| 7012 | float | RD | highest value apparent power L1 |
| 7014 | float | RD | highest value apparent power L2 |
| 7016 | float | RD | highest value apparent power L3 |
| 7018 | float | RD | highest value apparent power sum |
| 7020 | uint | RD | point in time, highest value apparent power L1 |
| 7022 | uint | RD | point in time, highest value apparent power L2 |
| 7024 | uint | RD | point in time, highest value apparent power L3 |
| 7026 | uint | RD | point in time, highest value apparent power sum |
| 7028 | float | RD | highest value active power L1, consumed |
| 7030 | float | RD | highest value active power L2, consumed |
| 7032 | float | RD | highest value active power L3, consumed |
| 7034 | float | RD | highest value active power sum, consumed |
| 7036 | uint | RD | point in time, highest value active power L1, consumed |
| 7038 | uint | RD | point in time, highest value active power L2, consumed |
| 7040 | uint | RD | point in time, highest value active power L3, consumed |
| 7042 | uint | RD | point in time, highest value active power sum, consumed |
| 7044 | float | RD | highest value active power L1, delivered |
| 7046 | float | RD | highest value active power L2, delivered |
| 7048 | float | RD | highest value active power L3, delivered |
| 7050 | float | RD | highest value active power sum, delivered |
| 7052 | uint | RD | point in time, highest value active power L1, delivered |
| 7054 | uint | RD | point in time, highest value active power L2, delivered |
| 7056 | uint | RD | point in time, highest value active power L3, delivered |
| 7058 | uint | RD | point in time, highest value active power sum, delivered |
| 7060 | float | RD | 2. highest value current L1 |
| 7062 | float | RD | 2. highest value current L2 |
| 7064 | float | RD | 2. highest value current L3 |
| 7066 | uint | RD | point in time, 2. highest value current L1 |
| 7068 | uint | RD | point in time, 2. highest value current L2 |
| 7070 | uint | RD | point in time, 2. highest value current L3 |
| 7072 | float | RD | 2. highest value apparent power L1 |
| 7074 | float | RD | 2. highest value apparent power L2 |
| 7076 | float | RD | 2. highest value apparent power L3 |
| 7078 | float | RD | 2. highest value apparent power sum |
| 7080 | uint | RD | point in time, 2. highest value apparent power L1 |
| 7082 | uint | RD | point in time, 2. highest value apparent power L2 |
| 7084 | uint | RD | point in time, 2. highest value apparent power L3 |
| 7086 | uint | RD | point in time, 2. highest value apparent power sum |
| 7088 | float | RD | 2. highest value active power L1, consumed |
| 7090 | float | RD | 2. highest value active power L2, consumed |
| 7092 | float | RD | 2. highest value active power L3, consumed |
| 7094 | float | RD | 2. highest value active power sum, consumed |
| 7096 | uint | RD | point in time, 2. highest value active power L1, consumed |
| 7098 | uint | RD | point in time, 2. highest value active power L2, consumed |
| 7100 | uint | RD | point in time, 2. highest value active power L3, consumed |
| 7102 | uint | RD | point in time, 2. highest value active power sum, consumed |
| 7104 | float | RD | 2. highest value active power L1, delivered |
| 7106 | float | RD | 2. highest value active power L2, delivered |
| 7108 | float | RD | 2. highest value active power L3, delivered |
| 7110 | float | RD | 2. highest value active power sum, delivered |
| 7112 | uint | RD | point in time, 2. highest value active power L1, delivered |
| 7114 | uint | RD | point in time, 2. highest value active power L2, delivered |
| 7116 | uint | RD | point in time, 2. highest value active power L3, delivered |

| Address | Format | RD/WR | Note |
|---------|--------|-------|---|
| 7118 | uint | RD | point in time, 2. highest value active power sum, delivered |
| 7120 | float | RD | 3. highest value current L1 |
| 7122 | float | RD | 3. highest value current L2 |
| 7124 | float | RD | 3. highest value current L3 |
| 7126 | uint | RD | point in time, 3. highest value current L1 |
| 7128 | uint | RD | point in time, 3. highest value current L2 |
| 7130 | uint | RD | point in time, 3. highest value current L3 |
| 7132 | float | RD | 3. highest value apparent power L1 |
| 7134 | float | RD | 3. highest value apparent power L2 |
| 7136 | float | RD | 3. highest value apparent power L3 |
| 7138 | float | RD | 3. highest value apparent power sum |
| 7140 | uint | RD | point in time, 3. highest value apparent power L1 |
| 7142 | uint | RD | point in time, 3. highest value apparent power L2 |
| 7144 | uint | RD | point in time, 3. highest value apparent power L3 |
| 7146 | uint | RD | point in time, 3. highest value apparent power sum |
| 7148 | float | RD | 3. highest value active power L1, consumed |
| 7150 | float | RD | 3. highest value active power L2, consumed |
| 7152 | float | RD | 3. highest value active power L3, consumed |
| 7154 | float | RD | 3. highest value active power sum, consumed |
| 7156 | uint | RD | point in time, 3. highest value active power L1, consumed |
| 7158 | uint | RD | point in time, 3. highest value active power L2, consumed |
| 7160 | uint | RD | point in time, 3. highest value active power L3, consumed |
| 7162 | uint | RD | point in time, 3. highest value active power sum, consumed |
| 7164 | float | RD | 3. highest value active power L1, delivered |
| 7166 | float | RD | 3. highest value active power L2, delivered |
| 7168 | float | RD | 3. highest value active power L3, delivered |
| 7170 | float | RD | 3. highest value active power sum, delivered |
| 7172 | uint | RD | point in time, 3. highest value active power L1, delivered |
| 7174 | uint | RD | point in time, 3. highest value active power L2, delivered |
| 7176 | uint | RD | point in time, 3. highest value active power L3, delivered |
| 7178 | uint | RD | point in time, 3. highest value active power sum, delivered |

Minimum values, time stamp

| Address | Format | RD/WR | Note |
|---------|--------|-------|--|
| 4200 | uint | RD | point in time, min. value, voltage L1-N |
| 4202 | uint | RD | point in time, min. value, voltage L2-N |
| 4204 | uint | RD | point in time, min. value, voltage L3-N |
| 4206 | uint | RD | point in time, min. value, voltage L1-L2 |
| 4208 | uint | RD | point in time, min. value, voltage L2-L3 |
| 4210 | uint | RD | point in time, min. value, voltage L3-L1 |
| 4212 | uint | RD | point in time, min. value, cos(phi) L1 |
| 4214 | uint | RD | point in time, min. value, cos(phi) L2 |
| 4216 | uint | RD | point in time, min. value, cos(phi) L3 |
| 4218 | uint | RD | point in time, min. value, cos(phi) sum |
| 4220 | uint | RD | point in time, min. value, 1. harmonic voltage L1 |
| 4222 | uint | RD | point in time, min. value, 3. harmonic voltage L1 |
| 4224 | uint | RD | point in time, min. value, 5. harmonic voltage L1 |
| 4226 | uint | RD | point in time, min. value, 7. harmonic voltage L1 |
| 4228 | uint | RD | point in time, min. value, 9. harmonic voltage L1 |
| 4230 | uint | RD | point in time, min. value, 11. harmonic voltage L1 |
| 4232 | uint | RD | point in time, min. value, 13. harmonic voltage L1 |
| 4234 | uint | RD | point in time, min. value, 15. harmonic voltage L1 |
| 4236 | uint | RD | point in time, min. value, 17. harmonic voltage L1 |
| 4238 | uint | RD | point in time, min. value, 19. harmonic voltage L1 |
| 4240 | uint | RD | point in time, min. value, 21. harmonic voltage L1 |
| 4242 | uint | RD | point in time, min. value, 23. harmonic voltage L1 |
| 4244 | uint | RD | point in time, min. value, 25. harmonic voltage L1 |
| 4246 | uint | RD | point in time, min. value, 1. harmonic voltage L2 |
| 4248 | uint | RD | point in time, min. value, 3. harmonic voltage L2 |
| 4250 | uint | RD | point in time, min. value, 5. harmonic voltage L2 |
| 4252 | uint | RD | point in time, min. value, 7. harmonic voltage L2 |
| 4254 | uint | RD | point in time, min. value, 9. harmonic voltage L2 |
| 4256 | uint | RD | point in time, min. value, 11. harmonic voltage L2 |
| 4258 | uint | RD | point in time, min. value, 13. harmonic voltage L2 |
| 4260 | uint | RD | point in time, min. value, 15. harmonic voltage L2 |
| 4262 | uint | RD | point in time, min. value, 17. harmonic voltage L2 |
| 4264 | uint | RD | point in time, min. value, 19. harmonic voltage L2 |
| 4266 | uint | RD | point in time, min. value, 21. harmonic voltage L2 |
| 4268 | uint | RD | point in time, min. value, 23. harmonic voltage L2 |
| 4270 | uint | RD | point in time, min. value, 25. harmonic voltage L2 |
| 4272 | uint | RD | point in time, min. value, 1. harmonic voltage L3 |
| 4274 | uint | RD | point in time, min. value, 3. harmonic voltage L3 |
| 4276 | uint | RD | point in time, min. value, 5. harmonic voltage L3 |
| 4278 | uint | RD | point in time, min. value, 7. harmonic voltage L3 |
| 4280 | uint | RD | point in time, min. value, 9. harmonic voltage L3 |
| 4282 | uint | RD | point in time, min. value, 11. harmonic voltage L3 |
| 4284 | uint | RD | point in time, min. value, 13. harmonic voltage L3 |
| 4286 | uint | RD | point in time, min. value, 15. harmonic voltage L3 |
| 4288 | uint | RD | point in time, min. value, 17. harmonic voltage L3 |
| 4290 | uint | RD | point in time, min. value, 19. harmonic voltage L3 |
| 4292 | uint | RD | point in time, min. value, 21. harmonic voltage L3 |
| 4294 | uint | RD | point in time, min. value, 23. harmonic voltage L3 |
| 4296 | uint | RD | point in time, min. value, 25. harmonic voltage L3 |
| 4298 | uint | RD | point in time, min. value, THD voltage L1 |
| 4300 | uint | RD | point in time, min. value, THD voltage L2 |
| 4302 | uint | RD | point in time, min. value, THD voltage L3 |
| 4304 | uint | RD | point in time, max. value, frequency |
| 4306 | uint | RD | point in time, min. value, voltage zero sequence |
| 4308 | uint | RD | point in time, min. value, voltage positive sequence |
| 4310 | uint | RD | point in time, min. value, voltage negative sequence |
| 4312 | uint | RD | point in time, min. value, active power L1 |

| Address | Format | RD/WR | Note |
|---------|--------|-------|---|
| 4314 | uint | RD | point in time, min. value, active power L2 |
| 4316 | uint | RD | point in time, min. value, active power L3 |
| 4318 | uint | RD | point in time, min. value, active power sum |

Maximum values, time stamp

| Address | Format | RD/WR | Note |
|---------|--------|-------|--|
| 3300 | uint | RD | point in time, max. value, voltage L1-N |
| 3302 | uint | RD | point in time, max. value, voltage L2-N |
| 3304 | uint | RD | point in time, max. value, voltage L3-N |
| 3306 | uint | RD | point in time, max. value, voltage L1-L2 |
| 3308 | uint | RD | point in time, max. value, voltage L2-L3 |
| 3310 | uint | RD | point in time, max. value, voltage L3-L1 |
| 3312 | uint | RD | point in time, max. value, current L1 |
| 3314 | uint | RD | point in time, max. value, current L2 |
| 3316 | uint | RD | point in time, max. value, current L3 |
| 3318 | uint | RD | point in time, max. value, current sum |
| 3320 | uint | RD | point in time, max. value, active power L1 |
| 3322 | uint | RD | point in time, max. value, active power L2 |
| 3324 | uint | RD | point in time, max. value, active power L3 |
| 3326 | uint | RD | point in time, max. value, active power sum |
| 3328 | uint | RD | point in time, max. value, reactive power L1 |
| 3330 | uint | RD | point in time, max. value, reactive power L2 |
| 3332 | uint | RD | point in time, max. value, reactive power L3 |
| 3334 | uint | RD | point in time, max. value, reactive power sum |
| 3336 | uint | RD | point in time, max. value, apparent power L1 |
| 3338 | uint | RD | point in time, max. value, apparent power L2 |
| 3340 | uint | RD | point in time, max. value, apparent power L3 |
| 3342 | uint | RD | point in time, max. value, apparent power sum |
| 3344 | uint | RD | point in time, max. value, cos(phi) L1 |
| 3346 | uint | RD | point in time, max. value, cos(phi) L2 |
| 3348 | uint | RD | point in time, max. value, cos(phi) L3 |
| 3350 | uint | RD | point in time, max. value, cos(phi) sum |
| 3352 | uint | RD | point in time, max. value, active power (fundamental oscillation) L1 |
| 3354 | uint | RD | point in time, max. value, active power (fundamental oscillation) L2 |
| 3356 | uint | RD | point in time, max. value, active power (fundamental oscillation) L3 |
| 3358 | uint | RD | point in time, max. value, 1. harmonic voltage L1 |
| 3360 | uint | RD | point in time, max. value, 3. harmonic voltage L1 |
| 3362 | uint | RD | point in time, max. value, 5. harmonic voltage L1 |
| 3364 | uint | RD | point in time, max. value, 7. harmonic voltage L1 |
| 3366 | uint | RD | point in time, max. value, 9. harmonic voltage L1 |
| 3368 | uint | RD | point in time, max. value, 11. harmonic voltage L1 |
| 3370 | uint | RD | point in time, max. value, 13. harmonic voltage L1 |
| 3372 | uint | RD | point in time, max. value, 15. harmonic voltage L1 |
| 3374 | uint | RD | point in time, max. value, 17. harmonic voltage L1 |
| 3376 | uint | RD | point in time, max. value, 19. harmonic voltage L1 |
| 3378 | uint | RD | point in time, max. value, 21. harmonic voltage L1 |
| 3380 | uint | RD | point in time, max. value, 23. harmonic voltage L1 |
| 3382 | uint | RD | point in time, max. value, 25. harmonic voltage L1 |
| 3384 | uint | RD | point in time, max. value, 1. harmonic voltage L2 |
| 3386 | uint | RD | point in time, max. value, 3. harmonic voltage L2 |
| 3388 | uint | RD | point in time, max. value, 5. harmonic voltage L2 |
| 3390 | uint | RD | point in time, max. value, 7. harmonic voltage L2 |
| 3392 | uint | RD | point in time, max. value, 9. harmonic voltage L2 |
| 3394 | uint | RD | point in time, max. value, 11. harmonic voltage L2 |
| 3396 | uint | RD | point in time, max. value, 13. harmonic voltage L2 |
| 3398 | uint | RD | point in time, max. value, 15. harmonic voltage L2 |
| 3400 | uint | RD | point in time, max. value, 17. harmonic voltage L2 |
| 3402 | uint | RD | point in time, max. value, 19. harmonic voltage L2 |
| 3404 | uint | RD | point in time, max. value, 21. harmonic voltage L2 |
| 3406 | uint | RD | point in time, max. value, 23. harmonic voltage L2 |
| 3408 | uint | RD | point in time, max. value, 25. harmonic voltage L2 |
| 3410 | uint | RD | point in time, max. value, 1. harmonic voltage L3 |
| 3412 | uint | RD | point in time, max. value, 3. harmonic voltage L3 |
| 3414 | uint | RD | point in time, max. value, 5. harmonic voltage L3 |

| Address | Format | RD/WR | Note |
|---------|--------|-------|--|
| 3416 | uint | RD | point in time, max. value, 7. harmonic voltage L3 |
| 3418 | uint | RD | point in time, max. value, 9. harmonic voltage L3 |
| 3420 | uint | RD | point in time, max. value, 11. harmonic voltage L3 |
| 3422 | uint | RD | point in time, max. value, 13. harmonic voltage L3 |
| 3424 | uint | RD | point in time, max. value, 15. harmonic voltage L3 |
| 3426 | uint | RD | point in time, max. value, 17. harmonic voltage L3 |
| 3428 | uint | RD | point in time, max. value, 19. harmonic voltage L3 |
| 3430 | uint | RD | point in time, max. value, 21. harmonic voltage L3 |
| 3432 | uint | RD | point in time, max. value, 23. harmonic voltage L3 |
| 3434 | uint | RD | point in time, max. value, 25. harmonic voltage L3 |
| 3436 | uint | RD | point in time, max. value, 1. harmonic current L1 |
| 3438 | uint | RD | point in time, max. value, 3. harmonic current L1 |
| 3440 | uint | RD | point in time, max. value, 5. harmonic current L1 |
| 3442 | uint | RD | point in time, max. value, 7. harmonic current L1 |
| 3444 | uint | RD | point in time, max. value, 9. harmonic current L1 |
| 3446 | uint | RD | point in time, max. value, 11. harmonic current L1 |
| 3448 | uint | RD | point in time, max. value, 13. harmonic current L1 |
| 3450 | uint | RD | point in time, max. value, 15. harmonic current L1 |
| 3452 | uint | RD | point in time, max. value, 17. harmonic current L1 |
| 3454 | uint | RD | point in time, max. value, 19. harmonic current L1 |
| 3456 | uint | RD | point in time, max. value, 21. harmonic current L1 |
| 3458 | uint | RD | point in time, max. value, 23. harmonic current L1 |
| 3460 | uint | RD | point in time, max. value, 25. harmonic current L1 |
| 3462 | uint | RD | point in time, max. value, 1. harmonic current L2 |
| 3464 | uint | RD | point in time, max. value, 3. harmonic current L2 |
| 3466 | uint | RD | point in time, max. value, 5. harmonic current L2 |
| 3468 | uint | RD | point in time, max. value, 7. harmonic current L2 |
| 3470 | uint | RD | point in time, max. value, 9. harmonic current L2 |
| 3472 | uint | RD | point in time, max. value, 11. harmonic current L2 |
| 3474 | uint | RD | point in time, max. value, 13. harmonic current L2 |
| 3476 | uint | RD | point in time, max. value, 15. harmonic current L2 |
| 3478 | uint | RD | point in time, max. value, 17. harmonic current L2 |
| 3480 | uint | RD | point in time, max. value, 19. harmonic current L2 |
| 3482 | uint | RD | point in time, max. value, 21. harmonic current L2 |
| 3484 | uint | RD | point in time, max. value, 23. harmonic current L2 |
| 3486 | uint | RD | point in time, max. value, 25. harmonic current L2 |
| 3488 | uint | RD | point in time, max. value, 1. harmonic current L3 |
| 3490 | uint | RD | point in time, max. value, 3. harmonic current L3 |
| 3492 | uint | RD | point in time, max. value, 5. harmonic current L3 |
| 3494 | uint | RD | point in time, max. value, 7. harmonic current L3 |
| 3496 | uint | RD | point in time, max. value, 9. harmonic current L3 |
| 3498 | uint | RD | point in time, max. value, 11. harmonic current L3 |
| 3500 | uint | RD | point in time, max. value, 13. harmonic current L3 |
| 3502 | uint | RD | point in time, max. value, 15. harmonic current L3 |
| 3504 | uint | RD | point in time, max. value, 17. harmonic current L3 |
| 3506 | uint | RD | point in time, max. value, 19. harmonic current L3 |
| 3508 | uint | RD | point in time, max. value, 21. harmonic current L3 |
| 3510 | uint | RD | point in time, max. value, 23. harmonic current L3 |
| 3512 | uint | RD | point in time, max. value, 25. harmonic current L3 |
| 3514 | uint | RD | point in time, max. value, THD voltage L1 |
| 3516 | uint | RD | point in time, max. value, THD voltage L2 |
| 3518 | uint | RD | point in time, max. value, THD voltage L3 |
| 3520 | uint | RD | point in time, max. value, THD current L1 |
| 3522 | uint | RD | point in time, max. value, THD current L2 |
| 3524 | uint | RD | point in time, max. value, THD current L3 |
| 3526 | uint | RD | point in time, max. value, frequency |
| 3528 | uint | RD | point in time, max. value, voltage zero sequence |
| 3530 | uint | RD | point in time, max. value, voltage positive sequence |
| 3532 | uint | RD | point in time, max. value, voltage negative sequence |

| Address | Format | RD/WR | Note |
|---------|--------|-------|--|
| 3534 | uint | RD | point in time, max. value, current zero sequence |
| 3536 | uint | RD | point in time, max. value, current positive sequence |
| 3538 | uint | RD | point in time, max. value, current negative sequence |
| 3540 | uint | RD | point in time, max. value, distortion power L1 |
| 3542 | uint | RD | point in time, max. value, distortion power L2 |
| 3544 | uint | RD | point in time, max. value, distortion power L3 |
| 3546 | uint | RD | point in time, max. value, distortion power sum |
| 3548 | uint | RD | point in time, max. value, mean value current L1 |
| 3550 | uint | RD | point in time, max. value, mean value current L2 |
| 3552 | uint | RD | point in time, max. value, mean value current L3 |
| 3554 | uint | RD | point in time, max. value, mean value current sum |
| 3556 | uint | RD | point in time, max. value, mean value active power L1 |
| 3558 | uint | RD | point in time, max. value, mean value active power L2 |
| 3560 | uint | RD | point in time, max. value, mean value active power L3 |
| 3562 | uint | RD | point in time, max. value, mean value active power sum |
| 3564 | uint | RD | point in time, max. value, TDD current L1 |
| 3566 | uint | RD | point in time, max. value, TDD current L2 |
| 3568 | uint | RD | point in time, max. value, TDD current L3 |

Fourier analysis

Measured values, type float, fourier analysis

| Address | Format | RD/WR | Note |
|---------|--------|-------|-------------------------|
| 1058 | float | RD | 1. harmonic voltage L1 |
| 1060 | float | RD | 3. harmonic voltage L1 |
| 1062 | float | RD | 5. harmonic voltage L1 |
| 1064 | float | RD | 7. harmonic voltage L1 |
| 1066 | float | RD | 9. harmonic voltage L1 |
| 1068 | float | RD | 11. harmonic voltage L1 |
| 1070 | float | RD | 13. harmonic voltage L1 |
| 1072 | float | RD | 15. harmonic voltage L1 |
| 1074 | float | RD | 17. harmonic voltage L1 |
| 1076 | float | RD | 19. harmonic voltage L1 |
| 1078 | float | RD | 21. harmonic voltage L1 |
| 1080 | float | RD | 23. harmonic voltage L1 |
| 1082 | float | RD | 25. harmonic voltage L1 |
| 1084 | float | RD | 1. harmonic voltage L2 |
| 1086 | float | RD | 3. harmonic voltage L2 |
| 1088 | float | RD | 5. harmonic voltage L2 |
| 1090 | float | RD | 7. harmonic voltage L2 |
| 1092 | float | RD | 9. harmonic voltage L2 |
| 1094 | float | RD | 11. harmonic voltage L2 |
| 1096 | float | RD | 13. harmonic voltage L2 |
| 1098 | float | RD | 15. harmonic voltage L2 |
| 1100 | float | RD | 17. harmonic voltage L2 |
| 1102 | float | RD | 19. harmonic voltage L2 |
| 1104 | float | RD | 21. harmonic voltage L2 |
| 1106 | float | RD | 23. harmonic voltage L2 |
| 1108 | float | RD | 25. harmonic voltage L2 |
| 1110 | float | RD | 1. harmonic voltage L3 |
| 1112 | float | RD | 3. harmonic voltage L3 |
| 1114 | float | RD | 5. harmonic voltage L3 |
| 1116 | float | RD | 7. harmonic voltage L3 |
| 1118 | float | RD | 9. harmonic voltage L3 |
| 1120 | float | RD | 11. harmonic voltage L3 |
| 1122 | float | RD | 13. harmonic voltage L3 |
| 1124 | float | RD | 15. harmonic voltage L3 |
| 1126 | float | RD | 17. harmonic voltage L3 |
| 1128 | float | RD | 19. harmonic voltage L3 |
| 1130 | float | RD | 21. harmonic voltage L3 |
| 1132 | float | RD | 23. harmonic voltage L3 |
| 1134 | float | RD | 25. harmonic voltage L3 |
| 1136 | float | RD | 1. harmonic current L1 |
| 1138 | float | RD | 3. harmonic current L1 |
| 1140 | float | RD | 5. harmonic current L1 |
| 1142 | float | RD | 7. harmonic current L1 |
| 1144 | float | RD | 9. harmonic current L1 |
| 1146 | float | RD | 11. harmonic current L1 |
| 1148 | float | RD | 13. harmonic current L1 |
| 1150 | float | RD | 15. harmonic current L1 |
| 1152 | float | RD | 17. harmonic current L1 |
| 1154 | float | RD | 19. harmonic current L1 |
| 1156 | float | RD | 21. harmonic current L1 |
| 1158 | float | RD | 23. harmonic current L1 |
| 1160 | float | RD | 25. harmonic current L1 |
| 1162 | float | RD | 1. harmonic current L2 |
| 1164 | float | RD | 3. harmonic current L2 |
| 1166 | float | RD | 5. harmonic current L2 |
| 1168 | float | RD | 7. harmonic current L2 |
| 1170 | float | RD | 9. harmonic current L2 |
| 1172 | float | RD | 11. harmonic current L2 |
| 1174 | float | RD | 13. harmonic current L2 |

| Address | Format | RD/WR | Note |
|---------|--------|-------|-------------------------|
| 1176 | float | RD | 15. harmonic current L2 |
| 1178 | float | RD | 17. harmonic current L2 |
| 1180 | float | RD | 19. harmonic current L2 |
| 1182 | float | RD | 21. harmonic current L2 |
| 1184 | float | RD | 23. harmonic current L2 |
| 1186 | float | RD | 25. harmonic current L2 |
| 1188 | float | RD | 1. harmonic current L3 |
| 1190 | float | RD | 3. harmonic current L3 |
| 1192 | float | RD | 5. harmonic current L3 |
| 1194 | float | RD | 7. harmonic current L3 |
| 1196 | float | RD | 9. harmonic current L3 |
| 1198 | float | RD | 11. harmonic current L3 |
| 1200 | float | RD | 13. harmonic current L3 |
| 1202 | float | RD | 15. harmonic current L3 |
| 1204 | float | RD | 17. harmonic current L3 |
| 1206 | float | RD | 19. harmonic current L3 |
| 1208 | float | RD | 21. harmonic current L3 |
| 1210 | float | RD | 23. harmonic current L3 |
| 1212 | float | RD | 25. harmonic current L3 |

Measured values, type short, fourier analysis

| Address | Format | RD/WR | Note |
|---------|-------------|-------|-------------------------|
| 11029 | short (x10) | RD | 1. harmonic voltage L1 |
| 11030 | short (x10) | RD | 3. harmonic voltage L1 |
| 11031 | short (x10) | RD | 5. harmonic voltage L1 |
| 11032 | short (x10) | RD | 7. harmonic voltage L1 |
| 11033 | short (x10) | RD | 9. harmonic voltage L1 |
| 11034 | short (x10) | RD | 11. harmonic voltage L1 |
| 11035 | short (x10) | RD | 13. harmonic voltage L1 |
| 11036 | short (x10) | RD | 15. harmonic voltage L1 |
| 11037 | short (x10) | RD | 17. harmonic voltage L1 |
| 11038 | short (x10) | RD | 19. harmonic voltage L1 |
| 11039 | short (x10) | RD | 21. harmonic voltage L1 |
| 11040 | short (x10) | RD | 23. harmonic voltage L1 |
| 11041 | short (x10) | RD | 25. harmonic voltage L1 |
| 11042 | short (x10) | RD | 1. harmonic voltage L2 |
| 11043 | short (x10) | RD | 3. harmonic voltage L2 |
| 11044 | short (x10) | RD | 5. harmonic voltage L2 |
| 11045 | short (x10) | RD | 7. harmonic voltage L2 |
| 11046 | short (x10) | RD | 9. harmonic voltage L2 |
| 11047 | short (x10) | RD | 11. harmonic voltage L2 |
| 11048 | short (x10) | RD | 13. harmonic voltage L2 |
| 11049 | short (x10) | RD | 15. harmonic voltage L2 |
| 11050 | short (x10) | RD | 17. harmonic voltage L2 |
| 11051 | short (x10) | RD | 19. harmonic voltage L2 |
| 11052 | short (x10) | RD | 21. harmonic voltage L2 |
| 11053 | short (x10) | RD | 23. harmonic voltage L2 |
| 11054 | short (x10) | RD | 25. harmonic voltage L2 |
| 11055 | short (x10) | RD | 1. harmonic voltage L3 |
| 11056 | short (x10) | RD | 3. harmonic voltage L3 |
| 11057 | short (x10) | RD | 5. harmonic voltage L3 |
| 11058 | short (x10) | RD | 7. harmonic voltage L3 |
| 11059 | short (x10) | RD | 9. harmonic voltage L3 |
| 11060 | short (x10) | RD | 11. harmonic voltage L3 |
| 11061 | short (x10) | RD | 13. harmonic voltage L3 |
| 11062 | short (x10) | RD | 15. harmonic voltage L3 |
| 11063 | short (x10) | RD | 17. harmonic voltage L3 |
| 11064 | short (x10) | RD | 19. harmonic voltage L3 |
| 11065 | short (x10) | RD | 21. harmonic voltage L3 |
| 11066 | short (x10) | RD | 23. harmonic voltage L3 |
| 11067 | short (x10) | RD | 25. harmonic voltage L3 |
| 11068 | short (x10) | RD | 1. harmonic current L1 |
| 11069 | short (x10) | RD | 3. harmonic current L1 |
| 11070 | short (x10) | RD | 5. harmonic current L1 |
| 11071 | short (x10) | RD | 7. harmonic current L1 |
| 11072 | short (x10) | RD | 9. harmonic current L1 |
| 11073 | short (x10) | RD | 11. harmonic current L1 |
| 11074 | short (x10) | RD | 13. harmonic current L1 |
| 11075 | short (x10) | RD | 15. harmonic current L1 |
| 11076 | short (x10) | RD | 17. harmonic current L1 |
| 11077 | short (x10) | RD | 19. harmonic current L1 |
| 11078 | short (x10) | RD | 21. harmonic current L1 |
| 11079 | short (x10) | RD | 23. harmonic current L1 |
| 11080 | short (x10) | RD | 25. harmonic current L1 |
| 11081 | short (x10) | RD | 1. harmonic current L2 |
| 11082 | short (x10) | RD | 3. harmonic current L2 |
| 11083 | short (x10) | RD | 5. harmonic current L2 |
| 11084 | short (x10) | RD | 7. harmonic current L2 |
| 11085 | short (x10) | RD | 9. harmonic current L2 |
| 11086 | short (x10) | RD | 11. harmonic current L2 |
| 11087 | short (x10) | RD | 13. harmonic current L2 |

| Address | Format | RD/WR | Note |
|---------|-------------|-------|-------------------------|
| 11088 | short (x10) | RD | 15. harmonic current L2 |
| 11089 | short (x10) | RD | 17. harmonic current L2 |
| 11090 | short (x10) | RD | 19. harmonic current L2 |
| 11091 | short (x10) | RD | 21. harmonic current L2 |
| 11092 | short (x10) | RD | 23. harmonic current L2 |
| 11093 | short (x10) | RD | 25. harmonic current L2 |
| 11094 | short (x10) | RD | 1. harmonic current L3 |
| 11095 | short (x10) | RD | 3. harmonic current L3 |
| 11096 | short (x10) | RD | 5. harmonic current L3 |
| 11097 | short (x10) | RD | 7. harmonic current L3 |
| 11098 | short (x10) | RD | 9. harmonic current L3 |
| 11099 | short (x10) | RD | 11. harmonic current L3 |
| 11100 | short (x10) | RD | 13. harmonic current L3 |
| 11101 | short (x10) | RD | 15. harmonic current L3 |
| 11102 | short (x10) | RD | 17. harmonic current L3 |
| 11103 | short (x10) | RD | 19. harmonic current L3 |
| 11104 | short (x10) | RD | 21. harmonic current L3 |
| 11105 | short (x10) | RD | 23. harmonic current L3 |
| 11106 | short (x10) | RD | 25. harmonic current L3 |

| Address | Format | RD/WR | Note |
|---------|--------|-------|------|
|---------|--------|-------|------|

Mean values, type float, fourier analysis

| Address | Format | RD/WR | Note |
|---------|--------|-------|------------------------------------|
| 2058 | float | RD | mean value 1. harmonic voltage L1 |
| 2060 | float | RD | mean value 3. harmonic voltage L1 |
| 2062 | float | RD | mean value 5. harmonic voltage L1 |
| 2064 | float | RD | mean value 7. harmonic voltage L1 |
| 2066 | float | RD | mean value 9. harmonic voltage L1 |
| 2068 | float | RD | mean value 11. harmonic voltage L1 |
| 2070 | float | RD | mean value 13. harmonic voltage L1 |
| 2072 | float | RD | mean value 15. harmonic voltage L1 |
| 2074 | float | RD | mean value 17. harmonic voltage L1 |
| 2076 | float | RD | mean value 19. harmonic voltage L1 |
| 2078 | float | RD | mean value 21. harmonic voltage L1 |
| 2080 | float | RD | mean value 23. harmonic voltage L1 |
| 2082 | float | RD | mean value 25. harmonic voltage L1 |
| 2084 | float | RD | mean value 1. harmonic voltage L2 |
| 2086 | float | RD | mean value 3. harmonic voltage L2 |
| 2088 | float | RD | mean value 5. harmonic voltage L2 |
| 2090 | float | RD | mean value 7. harmonic voltage L2 |
| 2092 | float | RD | mean value 9. harmonic voltage L2 |
| 2094 | float | RD | mean value 11. harmonic voltage L2 |
| 2096 | float | RD | mean value 13. harmonic voltage L2 |
| 2098 | float | RD | mean value 15. harmonic voltage L2 |
| 2100 | float | RD | mean value 17. harmonic voltage L2 |
| 2102 | float | RD | mean value 19. harmonic voltage L2 |
| 2104 | float | RD | mean value 21. harmonic voltage L2 |
| 2106 | float | RD | mean value 23. harmonic voltage L2 |
| 2108 | float | RD | mean value 25. harmonic voltage L2 |
| 2110 | float | RD | mean value 1. harmonic voltage L3 |
| 2112 | float | RD | mean value 3. harmonic voltage L3 |
| 2114 | float | RD | mean value 5. harmonic voltage L3 |
| 2116 | float | RD | mean value 7. harmonic voltage L3 |
| 2118 | float | RD | mean value 9. harmonic voltage L3 |
| 2120 | float | RD | mean value 11. harmonic voltage L3 |
| 2122 | float | RD | mean value 13. harmonic voltage L3 |
| 2124 | float | RD | mean value 15. harmonic voltage L3 |
| 2126 | float | RD | mean value 17. harmonic voltage L3 |
| 2128 | float | RD | mean value 19. harmonic voltage L3 |
| 2130 | float | RD | mean value 21. harmonic voltage L3 |
| 2132 | float | RD | mean value 23. harmonic voltage L3 |
| 2134 | float | RD | mean value 25. harmonic voltage L3 |
| 2136 | float | RD | mean value 1. harmonic current L1 |
| 2138 | float | RD | mean value 3. harmonic current L1 |
| 2140 | float | RD | mean value 5. harmonic current L1 |
| 2142 | float | RD | mean value 7. harmonic current L1 |
| 2144 | float | RD | mean value 9. harmonic current L1 |
| 2146 | float | RD | mean value 11. harmonic current L1 |
| 2148 | float | RD | mean value 13. harmonic current L1 |
| 2150 | float | RD | mean value 15. harmonic current L1 |
| 2152 | float | RD | mean value 17. harmonic current L1 |
| 2154 | float | RD | mean value 19. harmonic current L1 |
| 2156 | float | RD | mean value 21. harmonic current L1 |
| 2158 | float | RD | mean value 23. harmonic current L1 |
| 2160 | float | RD | mean value 25. harmonic current L1 |
| 2162 | float | RD | mean value 1. harmonic current L2 |
| 2164 | float | RD | mean value 3. harmonic current L2 |
| 2166 | float | RD | mean value 5. harmonic current L2 |
| 2168 | float | RD | mean value 7. harmonic current L2 |
| 2170 | float | RD | mean value 9. harmonic current L2 |
| 2172 | float | RD | mean value 11. harmonic current L2 |
| 2174 | float | RD | mean value 13. harmonic current L2 |

| Address | Format | RD/WR | Note |
|---------|--------|-------|------------------------------------|
| 2176 | float | RD | mean value 15. harmonic current L2 |
| 2178 | float | RD | mean value 17. harmonic current L2 |
| 2180 | float | RD | mean value 19. harmonic current L2 |
| 2182 | float | RD | mean value 21. harmonic current L2 |
| 2184 | float | RD | mean value 23. harmonic current L2 |
| 2186 | float | RD | mean value 25. harmonic current L2 |
| 2188 | float | RD | mean value 1. harmonic current L3 |
| 2190 | float | RD | mean value 3. harmonic current L3 |
| 2192 | float | RD | mean value 5. harmonic current L3 |
| 2194 | float | RD | mean value 7. harmonic current L3 |
| 2196 | float | RD | mean value 9. harmonic current L3 |
| 2198 | float | RD | mean value 11. harmonic current L3 |
| 2200 | float | RD | mean value 13. harmonic current L3 |
| 2202 | float | RD | mean value 15. harmonic current L3 |
| 2204 | float | RD | mean value 17. harmonic current L3 |
| 2206 | float | RD | mean value 19. harmonic current L3 |
| 2208 | float | RD | mean value 21. harmonic current L3 |
| 2210 | float | RD | mean value 23. harmonic current L3 |
| 2212 | float | RD | mean value 25. harmonic current L3 |

Mean values, type short, fourier analysis

| Address | Format | RD/WR | Note |
|---------|---------------|-------|------------------------------------|
| 12029 | short (x10) | RD | mean value 1. harmonic voltage L1 |
| 12030 | short (x10) | RD | mean value 3. harmonic voltage L1 |
| 12031 | short (x10) | RD | mean value 5. harmonic voltage L1 |
| 12032 | short (x10) | RD | mean value 7. harmonic voltage L1 |
| 12033 | short (x10) | RD | mean value 9. harmonic voltage L1 |
| 12034 | short (x10) | RD | mean value 11. harmonic voltage L1 |
| 12035 | short (x10) | RD | mean value 13. harmonic voltage L1 |
| 12036 | short (x10) | RD | mean value 15. harmonic voltage L1 |
| 12037 | short (x10) | RD | mean value 17. harmonic voltage L1 |
| 12038 | short (x10) | RD | mean value 19. harmonic voltage L1 |
| 12039 | short (x10) | RD | mean value 21. harmonic voltage L1 |
| 12040 | short (x10) | RD | mean value 23. harmonic voltage L1 |
| 12041 | short (x10) | RD | mean value 25. harmonic voltage L1 |
| 12042 | short (x10) | RD | mean value 1. harmonic voltage L2 |
| 12043 | short (x10) | RD | mean value 3. harmonic voltage L2 |
| 12044 | short (x10) | RD | mean value 5. harmonic voltage L2 |
| 12045 | short (x10) | RD | mean value 7. harmonic voltage L2 |
| 12046 | short (x10) | RD | mean value 9. harmonic voltage L2 |
| 12047 | short (x10) | RD | mean value 11. harmonic voltage L2 |
| 12048 | short (x10) | RD | mean value 13. harmonic voltage L2 |
| 12049 | short (x10) | RD | mean value 15. harmonic voltage L2 |
| 12050 | short (x10) | RD | mean value 17. harmonic voltage L2 |
| 12051 | short (x10) | RD | mean value 19. harmonic voltage L2 |
| 12052 | short (x10) | RD | mean value 21. harmonic voltage L2 |
| 12053 | short (x10) | RD | mean value 23. harmonic voltage L2 |
| 12054 | short (x10) | RD | mean value 25. harmonic voltage L2 |
| 12055 | short (x10) | RD | mean value 1. harmonic voltage L3 |
| 12056 | short (x10) | RD | mean value 3. harmonic voltage L3 |
| 12057 | short (x10) | RD | mean value 5. harmonic voltage L3 |
| 12058 | short (x10) | RD | mean value 7. harmonic voltage L3 |
| 12059 | short (x10) | RD | mean value 9. harmonic voltage L3 |
| 12060 | short (x10) | RD | mean value 11. harmonic voltage L3 |
| 12061 | short (x10) | RD | mean value 13. harmonic voltage L3 |
| 12062 | short (x10) | RD | mean value 15. harmonic voltage L3 |
| 12063 | short (x10) | RD | mean value 17. harmonic voltage L3 |
| 12064 | short (x10) | RD | mean value 19. harmonic voltage L3 |
| 12065 | short (x10) | RD | mean value 21. harmonic voltage L3 |
| 12066 | short (x10) | RD | mean value 23. harmonic voltage L3 |
| 12067 | short (x10) | RD | mean value 25. harmonic voltage L3 |
| 12068 | short (x1000) | RD | mean value 1. harmonic current L1 |
| 12069 | short (x1000) | RD | mean value 3. harmonic current L1 |
| 12070 | short (x1000) | RD | mean value 5. harmonic current L1 |
| 12071 | short (x1000) | RD | mean value 7. harmonic current L1 |
| 12072 | short (x1000) | RD | mean value 9. harmonic current L1 |
| 12073 | short (x1000) | RD | mean value 11. harmonic current L1 |
| 12074 | short (x1000) | RD | mean value 13. harmonic current L1 |
| 12075 | short (x1000) | RD | mean value 15. harmonic current L1 |
| 12076 | short (x1000) | RD | mean value 17. harmonic current L1 |
| 12077 | short (x1000) | RD | mean value 19. harmonic current L1 |
| 12078 | short (x1000) | RD | mean value 21. harmonic current L1 |
| 12079 | short (x1000) | RD | mean value 23. harmonic current L1 |
| 12080 | short (x1000) | RD | mean value 25. harmonic current L1 |
| 12081 | short (x1000) | RD | mean value 1. harmonic current L2 |
| 12082 | short (x1000) | RD | mean value 3. harmonic current L2 |
| 12083 | short (x1000) | RD | mean value 5. harmonic current L2 |
| 12084 | short (x1000) | RD | mean value 7. harmonic current L2 |
| 12085 | short (x1000) | RD | mean value 9. harmonic current L2 |
| 12086 | short (x1000) | RD | mean value 11. harmonic current L2 |
| 12087 | short (x1000) | RD | mean value 13. harmonic current L2 |

| Address | Format | RD/WR | Note |
|---------|---------------|-------|------------------------------------|
| 12088 | short (x1000) | RD | mean value 15. harmonic current L2 |
| 12089 | short (x1000) | RD | mean value 17. harmonic current L2 |
| 12090 | short (x1000) | RD | mean value 19. harmonic current L2 |
| 12091 | short (x1000) | RD | mean value 21. harmonic current L2 |
| 12092 | short (x1000) | RD | mean value 23. harmonic current L2 |
| 12093 | short (x1000) | RD | mean value 25. harmonic current L2 |
| 12094 | short (x1000) | RD | mean value 1. harmonic current L3 |
| 12095 | short (x1000) | RD | mean value 3. harmonic current L3 |
| 12096 | short (x1000) | RD | mean value 5. harmonic current L3 |
| 12097 | short (x1000) | RD | mean value 7. harmonic current L3 |
| 12098 | short (x1000) | RD | mean value 9. harmonic current L3 |
| 12099 | short (x1000) | RD | mean value 11. harmonic current L3 |
| 12100 | short (x1000) | RD | mean value 13. harmonic current L3 |
| 12101 | short (x1000) | RD | mean value 15. harmonic current L3 |
| 12102 | short (x1000) | RD | mean value 17. harmonic current L3 |
| 12103 | short (x1000) | RD | mean value 19. harmonic current L3 |
| 12104 | short (x1000) | RD | mean value 21. harmonic current L3 |
| 12105 | short (x1000) | RD | mean value 23. harmonic current L3 |
| 12106 | short (x1000) | RD | mean value 25. harmonic current L3 |

Maximum values, type float, fourier analysis

| Address | Format | RD/WR | Note |
|---------|--------|-------|-------------------------------------|
| 3058 | float | RD | max. value, 1. harmonic voltage L1 |
| 3060 | float | RD | max. value, 3. harmonic voltage L1 |
| 3062 | float | RD | max. value, 5. harmonic voltage L1 |
| 3064 | float | RD | max. value, 7. harmonic voltage L1 |
| 3066 | float | RD | max. value, 9. harmonic voltage L1 |
| 3068 | float | RD | max. value, 11. harmonic voltage L1 |
| 3070 | float | RD | max. value, 13. harmonic voltage L1 |
| 3072 | float | RD | max. value, 15. harmonic voltage L1 |
| 3074 | float | RD | max. value, 17. harmonic voltage L1 |
| 3076 | float | RD | max. value, 19. harmonic voltage L1 |
| 3078 | float | RD | max. value, 21. harmonic voltage L1 |
| 3080 | float | RD | max. value, 23. harmonic voltage L1 |
| 3082 | float | RD | max. value, 25. harmonic voltage L1 |
| 3084 | float | RD | max. value, 1. harmonic voltage L2 |
| 3086 | float | RD | max. value, 3. harmonic voltage L2 |
| 3088 | float | RD | max. value, 5. harmonic voltage L2 |
| 3090 | float | RD | max. value, 7. harmonic voltage L2 |
| 3092 | float | RD | max. value, 9. harmonic voltage L2 |
| 3094 | float | RD | max. value, 11. harmonic voltage L2 |
| 3096 | float | RD | max. value, 13. harmonic voltage L2 |
| 3098 | float | RD | max. value, 15. harmonic voltage L2 |
| 3100 | float | RD | max. value, 17. harmonic voltage L2 |
| 3102 | float | RD | max. value, 19. harmonic voltage L2 |
| 3104 | float | RD | max. value, 21. harmonic voltage L2 |
| 3106 | float | RD | max. value, 23. harmonic voltage L2 |
| 3108 | float | RD | max. value, 25. harmonic voltage L2 |
| 3110 | float | RD | max. value, 1. harmonic voltage L3 |
| 3112 | float | RD | max. value, 3. harmonic voltage L3 |
| 3114 | float | RD | max. value, 5. harmonic voltage L3 |
| 3116 | float | RD | max. value, 7. harmonic voltage L3 |
| 3118 | float | RD | max. value, 9. harmonic voltage L3 |
| 3120 | float | RD | max. value, 11. harmonic voltage L3 |
| 3122 | float | RD | max. value, 13. harmonic voltage L3 |
| 3124 | float | RD | max. value, 15. harmonic voltage L3 |
| 3126 | float | RD | max. value, 17. harmonic voltage L3 |
| 3128 | float | RD | max. value, 19. harmonic voltage L3 |
| 3130 | float | RD | max. value, 21. harmonic voltage L3 |
| 3132 | float | RD | max. value, 23. harmonic voltage L3 |
| 3134 | float | RD | max. value, 25. harmonic voltage L3 |
| 3136 | float | RD | max. value, 1. harmonic current L1 |
| 3138 | float | RD | max. value, 3. harmonic current L1 |
| 3140 | float | RD | max. value, 5. harmonic current L1 |
| 3142 | float | RD | max. value, 7. harmonic current L1 |
| 3144 | float | RD | max. value, 9. harmonic current L1 |
| 3146 | float | RD | max. value, 11. harmonic current L1 |
| 3148 | float | RD | max. value, 13. harmonic current L1 |
| 3150 | float | RD | max. value, 15. harmonic current L1 |
| 3152 | float | RD | max. value, 17. harmonic current L1 |
| 3154 | float | RD | max. value, 19. harmonic current L1 |
| 3156 | float | RD | max. value, 21. harmonic current L1 |
| 3158 | float | RD | max. value, 23. harmonic current L1 |
| 3160 | float | RD | max. value, 25. harmonic current L1 |
| 3162 | float | RD | max. value, 1. harmonic current L2 |
| 3164 | float | RD | max. value, 3. harmonic current L2 |
| 3166 | float | RD | max. value, 5. harmonic current L2 |
| 3168 | float | RD | max. value, 7. harmonic current L2 |
| 3170 | float | RD | max. value, 9. harmonic current L2 |
| 3172 | float | RD | max. value, 11. harmonic current L2 |
| 3174 | float | RD | max. value, 13. harmonic current L2 |

| Address | Format | RD/WR | Note |
|---------|--------|-------|-------------------------------------|
| 3176 | float | RD | max. value, 15. harmonic current L2 |
| 3178 | float | RD | max. value, 17. harmonic current L2 |
| 3180 | float | RD | max. value, 19. harmonic current L2 |
| 3182 | float | RD | max. value, 21. harmonic current L2 |
| 3184 | float | RD | max. value, 23. harmonic current L2 |
| 3186 | float | RD | max. value, 25. harmonic current L2 |
| 3188 | float | RD | max. value, 1. harmonic current L3 |
| 3190 | float | RD | max. value, 3. harmonic current L3 |
| 3192 | float | RD | max. value, 5. harmonic current L3 |
| 3194 | float | RD | max. value, 7. harmonic current L3 |
| 3196 | float | RD | max. value, 9. harmonic current L3 |
| 3198 | float | RD | max. value, 11. harmonic current L3 |
| 3200 | float | RD | max. value, 13. harmonic current L3 |
| 3202 | float | RD | max. value, 15. harmonic current L3 |
| 3204 | float | RD | max. value, 17. harmonic current L3 |
| 3206 | float | RD | max. value, 19. harmonic current L3 |
| 3208 | float | RD | max. value, 21. harmonic current L3 |
| 3210 | float | RD | max. value, 23. harmonic current L3 |
| 3212 | float | RD | max. value, 25. harmonic current L3 |

Maximum values, type short, fourier analysis

| Address | Format | RD/WR | Note |
|---------|---------------|-------|-------------------------------------|
| 13029 | short (x10) | RD | max. value, 1. harmonic voltage L1 |
| 13030 | short (x10) | RD | max. value, 3. harmonic voltage L1 |
| 13031 | short (x10) | RD | max. value, 5. harmonic voltage L1 |
| 13032 | short (x10) | RD | max. value, 7. harmonic voltage L1 |
| 13033 | short (x10) | RD | max. value, 9. harmonic voltage L1 |
| 13034 | short (x10) | RD | max. value, 11. harmonic voltage L1 |
| 13035 | short (x10) | RD | max. value, 13. harmonic voltage L1 |
| 13036 | short (x10) | RD | max. value, 15. harmonic voltage L1 |
| 13037 | short (x10) | RD | max. value, 17. harmonic voltage L1 |
| 13038 | short (x10) | RD | max. value, 19. harmonic voltage L1 |
| 13039 | short (x10) | RD | max. value, 21. harmonic voltage L1 |
| 13040 | short (x10) | RD | max. value, 23. harmonic voltage L1 |
| 13041 | short (x10) | RD | max. value, 25. harmonic voltage L1 |
| 13042 | short (x10) | RD | max. value, 1. harmonic voltage L2 |
| 13043 | short (x10) | RD | max. value, 3. harmonic voltage L2 |
| 13044 | short (x10) | RD | max. value, 5. harmonic voltage L2 |
| 13045 | short (x10) | RD | max. value, 7. harmonic voltage L2 |
| 13046 | short (x10) | RD | max. value, 9. harmonic voltage L2 |
| 13047 | short (x10) | RD | max. value, 11. harmonic voltage L2 |
| 13048 | short (x10) | RD | max. value, 13. harmonic voltage L2 |
| 13049 | short (x10) | RD | max. value, 15. harmonic voltage L2 |
| 13050 | short (x10) | RD | max. value, 17. harmonic voltage L2 |
| 13051 | short (x10) | RD | max. value, 19. harmonic voltage L2 |
| 13052 | short (x10) | RD | max. value, 21. harmonic voltage L2 |
| 13053 | short (x10) | RD | max. value, 23. harmonic voltage L2 |
| 13054 | short (x10) | RD | max. value, 25. harmonic voltage L2 |
| 13055 | short (x10) | RD | max. value, 1. harmonic voltage L3 |
| 13056 | short (x10) | RD | max. value, 3. harmonic voltage L3 |
| 13057 | short (x10) | RD | max. value, 5. harmonic voltage L3 |
| 13058 | short (x10) | RD | max. value, 7. harmonic voltage L3 |
| 13059 | short (x10) | RD | max. value, 9. harmonic voltage L3 |
| 13060 | short (x10) | RD | max. value, 11. harmonic voltage L3 |
| 13061 | short (x10) | RD | max. value, 13. harmonic voltage L3 |
| 13062 | short (x10) | RD | max. value, 15. harmonic voltage L3 |
| 13063 | short (x10) | RD | max. value, 17. harmonic voltage L3 |
| 13064 | short (x10) | RD | max. value, 19. harmonic voltage L3 |
| 13065 | short (x10) | RD | max. value, 21. harmonic voltage L3 |
| 13066 | short (x10) | RD | max. value, 23. harmonic voltage L3 |
| 13067 | short (x10) | RD | max. value, 25. harmonic voltage L3 |
| 13068 | short (x1000) | RD | max. value, 1. harmonic current L1 |
| 13069 | short (x1000) | RD | max. value, 3. harmonic current L1 |
| 13070 | short (x1000) | RD | max. value, 5. harmonic current L1 |
| 13071 | short (x1000) | RD | max. value, 7. harmonic current L1 |
| 13072 | short (x1000) | RD | max. value, 9. harmonic current L1 |
| 13073 | short (x1000) | RD | max. value, 11. harmonic current L1 |
| 13074 | short (x1000) | RD | max. value, 13. harmonic current L1 |
| 13075 | short (x1000) | RD | max. value, 15. harmonic current L1 |
| 13076 | short (x1000) | RD | max. value, 17. harmonic current L1 |
| 13077 | short (x1000) | RD | max. value, 19. harmonic current L1 |
| 13078 | short (x1000) | RD | max. value, 21. harmonic current L1 |
| 13079 | short (x1000) | RD | max. value, 23. harmonic current L1 |
| 13080 | short (x1000) | RD | max. value, 25. harmonic current L1 |
| 13081 | short (x1000) | RD | max. value, 1. harmonic current L2 |
| 13082 | short (x1000) | RD | max. value, 3. harmonic current L2 |
| 13083 | short (x1000) | RD | max. value, 5. harmonic current L2 |
| 13084 | short (x1000) | RD | max. value, 7. harmonic current L2 |
| 13085 | short (x1000) | RD | max. value, 9. harmonic current L2 |
| 13086 | short (x1000) | RD | max. value, 11. harmonic current L2 |
| 13087 | short (x1000) | RD | max. value, 13. harmonic current L2 |

| Address | Format | RD/WR | Note |
|---------|---------------|-------|-------------------------------------|
| 13088 | short (x1000) | RD | max. value, 15. harmonic current L2 |
| 13089 | short (x1000) | RD | max. value, 17. harmonic current L2 |
| 13090 | short (x1000) | RD | max. value, 19. harmonic current L2 |
| 13091 | short (x1000) | RD | max. value, 21. harmonic current L2 |
| 13092 | short (x1000) | RD | max. value, 23. harmonic current L2 |
| 13093 | short (x1000) | RD | max. value, 25. harmonic current L2 |
| 13094 | short (x1000) | RD | max. value, 1. harmonic current L3 |
| 13095 | short (x1000) | RD | max. value, 3. harmonic current L3 |
| 13096 | short (x1000) | RD | max. value, 5. harmonic current L3 |
| 13097 | short (x1000) | RD | max. value, 7. harmonic current L3 |
| 13098 | short (x1000) | RD | max. value, 9. harmonic current L3 |
| 13099 | short (x1000) | RD | max. value, 11. harmonic current L3 |
| 13100 | short (x1000) | RD | max. value, 13. harmonic current L3 |
| 13101 | short (x1000) | RD | max. value, 15. harmonic current L3 |
| 13102 | short (x1000) | RD | max. value, 17. harmonic current L3 |
| 13103 | short (x1000) | RD | max. value, 19. harmonic current L3 |
| 13104 | short (x1000) | RD | max. value, 21. harmonic current L3 |
| 13105 | short (x1000) | RD | max. value, 23. harmonic current L3 |
| 13106 | short (x1000) | RD | max. value, 25. harmonic current L3 |

Minimum values, type float, fourier analysis

| Address | Format | RD/WR | Note |
|---------|--------|-------|-------------------------------------|
| 4020 | float | RD | min. value, 1. harmonic voltage L1 |
| 4022 | float | RD | min. value, 3. harmonic voltage L1 |
| 4024 | float | RD | min. value, 5. harmonic voltage L1 |
| 4026 | float | RD | min. value, 7. harmonic voltage L1 |
| 4028 | float | RD | min. value, 9. harmonic voltage L1 |
| 4030 | float | RD | min. value, 11. harmonic voltage L1 |
| 4032 | float | RD | min. value, 13. harmonic voltage L1 |
| 4034 | float | RD | min. value, 15. harmonic voltage L1 |
| 4036 | float | RD | min. value, 17. harmonic voltage L1 |
| 4038 | float | RD | min. value, 19. harmonic voltage L1 |
| 4040 | float | RD | min. value, 21. harmonic voltage L1 |
| 4042 | float | RD | min. value, 23. harmonic voltage L1 |
| 4044 | float | RD | min. value, 25. harmonic voltage L1 |
| 4046 | float | RD | min. value, 1. harmonic voltage L2 |
| 4048 | float | RD | min. value, 3. harmonic voltage L2 |
| 4050 | float | RD | min. value, 5. harmonic voltage L2 |
| 4052 | float | RD | min. value, 7. harmonic voltage L2 |
| 4054 | float | RD | min. value, 9. harmonic voltage L2 |
| 4056 | float | RD | min. value, 11. harmonic voltage L2 |
| 4058 | float | RD | min. value, 13. harmonic voltage L2 |
| 4060 | float | RD | min. value, 15. harmonic voltage L2 |
| 4062 | float | RD | min. value, 17. harmonic voltage L2 |
| 4064 | float | RD | min. value, 19. harmonic voltage L2 |
| 4066 | float | RD | min. value, 21. harmonic voltage L2 |
| 4068 | float | RD | min. value, 23. harmonic voltage L2 |
| 4070 | float | RD | min. value, 25. harmonic voltage L2 |
| 4072 | float | RD | min. value, 1. harmonic voltage L3 |
| 4074 | float | RD | min. value, 3. harmonic voltage L3 |
| 4076 | float | RD | min. value, 5. harmonic voltage L3 |
| 4078 | float | RD | min. value, 7. harmonic voltage L3 |
| 4080 | float | RD | min. value, 9. harmonic voltage L3 |
| 4082 | float | RD | min. value, 11. harmonic voltage L3 |
| 4084 | float | RD | min. value, 13. harmonic voltage L3 |
| 4086 | float | RD | min. value, 15. harmonic voltage L3 |
| 4088 | float | RD | min. value, 17. harmonic voltage L3 |
| 4090 | float | RD | min. value, 19. harmonic voltage L3 |
| 4092 | float | RD | min. value, 21. harmonic voltage L3 |
| 4094 | float | RD | min. value, 23. harmonic voltage L3 |
| 4096 | float | RD | min. value, 25. harmonic voltage L3 |

Minimum values, type short, fourier analysis

| Address | Format | RD/WR | Note |
|---------|-------------|-------|-------------------------------------|
| 14010 | short (x10) | RD | min. value, 1. harmonic voltage L1 |
| 14011 | short (x10) | RD | min. value, 3. harmonic voltage L1 |
| 14012 | short (x10) | RD | min. value, 5. harmonic voltage L1 |
| 14013 | short (x10) | RD | min. value, 7. harmonic voltage L1 |
| 14014 | short (x10) | RD | min. value, 9. harmonic voltage L1 |
| 14015 | short (x10) | RD | min. value, 11. harmonic voltage L1 |
| 14016 | short (x10) | RD | min. value, 13. harmonic voltage L1 |
| 14017 | short (x10) | RD | min. value, 15. harmonic voltage L1 |
| 14018 | short (x10) | RD | min. value, 17. harmonic voltage L1 |
| 14019 | short (x10) | RD | min. value, 19. harmonic voltage L1 |
| 14020 | short (x10) | RD | min. value, 21. harmonic voltage L1 |
| 14021 | short (x10) | RD | min. value, 23. harmonic voltage L1 |
| 14022 | short (x10) | RD | min. value, 25. harmonic voltage L1 |
| 14023 | short (x10) | RD | min. value, 1. harmonic voltage L2 |
| 14024 | short (x10) | RD | min. value, 3. harmonic voltage L2 |
| 14025 | short (x10) | RD | min. value, 5. harmonic voltage L2 |
| 14026 | short (x10) | RD | min. value, 7. harmonic voltage L2 |
| 14027 | short (x10) | RD | min. value, 9. harmonic voltage L2 |
| 14028 | short (x10) | RD | min. value, 11. harmonic voltage L2 |
| 14029 | short (x10) | RD | min. value, 13. harmonic voltage L2 |
| 14030 | short (x10) | RD | min. value, 15. harmonic voltage L2 |
| 14031 | short (x10) | RD | min. value, 17. harmonic voltage L2 |
| 14032 | short (x10) | RD | min. value, 19. harmonic voltage L2 |
| 14033 | short (x10) | RD | min. value, 21. harmonic voltage L2 |
| 14034 | short (x10) | RD | min. value, 23. harmonic voltage L2 |
| 14035 | short (x10) | RD | min. value, 25. harmonic voltage L2 |
| 14036 | short (x10) | RD | min. value, 1. harmonic voltage L3 |
| 14037 | short (x10) | RD | min. value, 3. harmonic voltage L3 |
| 14038 | short (x10) | RD | min. value, 5. harmonic voltage L3 |
| 14039 | short (x10) | RD | min. value, 7. harmonic voltage L3 |
| 14040 | short (x10) | RD | min. value, 9. harmonic voltage L3 |
| 14041 | short (x10) | RD | min. value, 11. harmonic voltage L3 |
| 14042 | short (x10) | RD | min. value, 13. harmonic voltage L3 |
| 14043 | short (x10) | RD | min. value, 15. harmonic voltage L3 |
| 14044 | short (x10) | RD | min. value, 17. harmonic voltage L3 |
| 14045 | short (x10) | RD | min. value, 19. harmonic voltage L3 |
| 14046 | short (x10) | RD | min. value, 21. harmonic voltage L3 |
| 14047 | short (x10) | RD | min. value, 23. harmonic voltage L3 |
| 14048 | short (x10) | RD | min. value, 25. harmonic voltage L3 |